

procut Made in Ireland

Tungsten Carbide Burr
Europe's specialist manufacturer of Tungsten Carbide Burrs. Whatever your concern, PROCUT can offer the solution.

*Options: 8mm shank and extended shank available on request.



BS2 - 8 Piece Burr Set (6mm shank / Cut 6)



BS1A - 10 Piece Burr Set (3mm shank / Cut 6)

Part No.	Head Dia (mm)	Head Length (mm)	Shank Dia (mm)	Sketch
Cylinder				
A30211	2.0	11.0	3	
A30314	3.0	14.0	3	
A30605	6.3	4.7	3	
A30612	6.3	12.7	3	
A60618	6.0	18.0	6	
A60820	8.0	19.0	6	
A61020	9.6	19.0	6	
A61220	12.7	19.0	6	
A61225*	12.7	25.0	6	
A61525*	16.0	25.0	6	
A62025*	19.0	25.0	6	
A62525*	25.0	25.0	6	
Cylinder with Endcut				
B30211	2.0	11.0	3	
B30314	3.0	14.0	3	
B30605	6.3	4.7	3	
B30612	6.3	12.7	3	
B60618	6.0	18.0	6	
B60820	8.0	19.0	6	
B61020	9.6	19.0	6	
B61225*	12.7	25.0	6	
B61525*	16.0	25.0	6	
B62025*	19.0	25.0	6	
B62525*	25.0	25.0	6	
Ball Nosed Cylinder				
C30211	2.0	11.0	3	
C30312	3.0	14.0	3	
C30612	6.3	12.7	3	
C60618	6.0	18.0	6	
C60820	8.0	19.0	6	
C61020	9.6	19.0	6	
C61125	11.0	25.0	6	
C61225*	12.7	25.0	6	
C61525*	16.0	25.0	6	
C62025*	19.0	25.0	6	

Part No.	Head Dia (mm)	Head Length (mm)	Shank Dia (mm)	Sketch	
Ball					
D30202	2.0	1.8	3		
D30303	3.0	2.5	3		
D30404	4.0	3.4	3		
D30505	5.0	4.7	3		
D30606	6.3	5.0	3		
D60606	6.0	4.7	6		
D60808	8.0	6.0	6		
D61010	9.6	8.0	6		
D61111	11.0	9.5	6		
D61212*	12.7	11.0	6		
D61515*	16.0	14.0	6		
D62020*	19.0	16.5	6		
D62525*	25.0	22.0	6		
Oval					
E30306	3.0	6.0	3		
E30610	6.3	9.5	3		
E60610	6.0	10.0	6		
E60815	8.0	15.0	6		
E61015	9.6	16.0	6		
E61220*	12.7	22.0	6		
E61525*	16.0	25.0	6		
E62025*	19.0	25.0	6		
Ball Nosed Tree					
F30308	3.0	8.0	3		
F30312	3.0	14.0	3		
F30612	6.3	12.7	3		
F60618	6.0	18.0	6		
F60820	8.0	20.0	6		
F61020	9.6	19.0	6		
F61220	12.7	19.0	6		
F61225*	12.7	25.0	6		
F61525*	16.0	25.0	6		
F62025*	19.0	25.0	6		
F62032*	19.0	32.0	6		

Part No.	Head Dia (mm)	Head Length (mm)	Shank Dia (mm)	Sketch	
Flame					
H30306	3.0	6.0	3		
H30612	6.0	10.0	3		
H60820	8.0	19.0	6		
H61020	9.6	19.0	6		
H61232*	12.7	32.0	6		
H61535*	16.0	36.0	6		
H62042*	19.0	41.0	6		
60°/90° Countersink					
J60606	6.0	4.0	6		
J61008	9.6	8.0	6		
J61210*	12.7	11.0	6		
J61512*	16.0	14.5	6		
J62018*	19.0	17.5	6		
K30303	3.0	1.5	3		
K60603	6.0	3.0	6		
K61004	9.6	4.7	6		
K61206*	12.7	6.3	6		
K61508*	16.0	8.0	6		
K62012*	19.0	9.5	6		
Ball Nose Cone					
L30310	3.0	10.0	3		
L30312	3.0	14.0	3		
L60618	6.0	18.0	6		
L60822	8.0	25.4	6		
L61026	9.6	30.0	6		
L61228*	12.7	32.0	6		
L61533*	16.0	33.0	6		
L62038*	19.0	41.0	6		
Cone					
M30311	3.0	11.0	3		
M30315	3.0	15.0	3		
M30612	6.3	12.7	3		
M60620	6.0	20.0	6		
M61020	9.6	16.0	6		
M61222*	12.7	22.0	6		
M61525*	16.0	25.0	6		
Inverted Cone					
N30304	3.0	4.0	3		
N30606	6.3	6.0	3		
N60606	6.0	8.0	6		
N61010	9.6	9.5	6		
N61212*	12.7	12.7	6		
N61520*	16.0	19.0	6		
N62015*	19.0	16.0	6		

ata ATA Pneumatic PowerTools Made in Ireland

High Performance tools to match your Procut Burrs
Better Finish - Longer Life - Lower Cost

RAL-20L - 20,000rpm Professional Belt Sander
SDH-30LR-150 - 30,000rpm Die Grinder
ST-100 - 100,000rpm Turbine Grinder

SP-60R - 60,000rpm Pencil Grinder
RP-25R - 25,000rpm Right Angle Die Grinder
EP400-1 Air Pen (Engravepen) Air Pen Carbide tip can write on hardened steel, glass and many other hard surfaces

Please ask for other ATA professional air tools

aer service PORTABLE AIR CLEANER Made in Italy

- Cleans Air in your workshop
- Power supply 230V 1ph 50Hz

UNI-2.0

- High filter efficiency (<99.5%)
- Portability (Trolley/Mounted)
- Low noise level (70dB(A)): Like Office condition
- Easy Maintenance: Reduces downtime and save cost
- Large Operating Area: 3 metre articulated arm of diameter 160mm to reach tight corner

Barrel Pump - BDP 10

Net Weight: 5.3kg
Overall Length: 1,175mm
Min operating pump will enter: 54mm
Air inlet hose size: 6.30mm
Air outlet hose size: 19.05mm
Air consumption: 0.34 m³/min
Fluid outlet hose size: 19.0mm

flexPower Made in Taiwan

Shut-off Screwdriver

Angle Head type
Lever type
Push-start type
Pistol type

Air Boss Made in Taiwan

DR-65 Straight Drill
DR-26L-1BF Ext. Die Grinder (Safety Lever)
SG-65HL-1 Ext. Straight Grinder
SG-125HL-2 Ext Straight Grinder
AB-10 Impact Screwdriver
AB-1700P Impact Wrench

TORERO Made in Taiwan

Pulse Wrench

Shut Off Type OBT-50PD
Non Shut Off Type OBN-50PD

APAC Made in Taiwan

Air Tapper and Air Saw

Air Tapper A16-K0102
Air Saw and File A16-B0520

OUR QUALITY PACKAGE

TOKU AIR TOOLS

Made in Japan

Impact Wrench




Model No.	MI-1311B	MI-17M	MI-20P	MI-1625B	MI-2500P	MI-2500G	MI-3800P	MI-3800GL	MI-5000P	MI-5000GL	MI-5500
Bolt Capacity (mm)	10	16	22	22	25	25	38	38	50	50	55
Net Weight (kg)	1.3	2.5	3.9	5.6	8.2	8.5	9.5	10.2	13.9	16.0	18.1
Max Torque (kg.m)	10	R55 L60	100	129	130	130	200	200	270	270	560
Free Speed (rpm)	7,000	5,500	5,000	5,000	5,300	5,300	4,700	4,700	3,700	3,700	2,800

Ratchet Wrench



Model No.	MR-2207C	MR-2209C	MR-2310B	MR-2410B
Square Drive	1/4"	3/8"	3/8"	1/2"
Bolt Capacity (mm)	8	8	10	10
Net Weight (kg)	0.53	0.53	1.13	1.13
Max Torque (kg.m)	5.5	5.6	8.3	8.3
Free Speed (rpm)	250	250	180	180

Drill - Reversible



Model No.	MD-3310B	MD-3311B	MD-3312B	MD-3413B	SM-7H-7538
Chuck Size (mm)	10 (3/8")	10 (3/8")	10 (3/8")	13 (1/2")	16
Free Speed (rpm)	2,400	2,000	1,200	500	800
Net Weight (kg)	1.0	1.1	1.2	1.6	7.9
OA Length (mm)	165	200	208	220	328

Angle Grinder



Model No.	TAG-20NR	TAG-40SA	TAG-40MR	TAG-40FR	TAG-400QJL	TAG-700	TAG-700QJL	TAG-900QJL	YA-5K-2
Wheel Size (mm)	58	100 x 16	100 x M10	100 x 16	100 x 16	180 x 22	180 x 22	230 x 22	125 x 16
Free Speed (rpm)	12,500	12,000	12,000	12,000	12,000	7,500	8,400	6,500	8,400
Net Weight (kg)	0.55	1.4	1.4	1.4	1.8	3.1	3.1	3.4	1.5
OA Length (mm)	162	204	195	195	266	274	304	304	233 (200)

Die Grinder & Straight Grinder



Model No.	MG-7204B	MG-7236B	MG-20	MG-7206B	TG-25ZII	TG-38Z	TSG-3C	NG-65LCR	NG-65LL	TSG-3F	TSG-5S	TSG-6S
Wheel Size (mm)	25	25	25	25	25	25	38	25	25	75x13x9.5	125x19x12.7	150x25x15.9
Free Speed (rpm)	25,000	18,000	22,000	22,000	18,000	23,000	12,700	16,000	16,000	12,700	7,600	6,300
Net Weight (kg)	0.4	0.4	0.6	0.6	0.56	0.7	1.6	1.35	1.6	1.6	3.0	4.2
OA Length (mm)	120	123	139	146	150	178	340	370	515	305	400	430

TKK TOYO KOKEN K.K. Made in Japan

Baby Electric Winch
MA-650MB (220V)
MA-650M (100V)
Capacity: 150 kg
Wire-rope: 5 mm x 40 m

STAR LIFTKET Made in Germany

Electric Winch
LSF-200 (400V)
Capacity : 200 kg
Wire-rope : 5 mm x 80 m

HYCON Made in Denmark

Hydraulic Breaker

- More Powerful, light weight & Low Noise
- Low cost of maintenance

Ring Saw

- Very powerful
- Ergonomic design for operator comfort
- Long Life-time - all parts run in oil



Made in Japan

Scaling Hammer

Piston Diameter	30 mm
Blow/min	8,000 bpm
Net Weight	2.2 kg



Flux Chipper & Chisel Scaler



Model No.	TFC-200	TFC-200F	AFC-30C	AFC-20C
Blow / min (bpm)	12,000	12,000	4,000	4,000
Net Weight (kg)	0.89	1.06	1.7	1.8
OA Length (mm)	182	187	210	180
Standard Chisel	C-15	C-20	C-25	C-25

Needle Scaler



Model No.	TJN-200	AFC-20N	AFC-30N
No. of needle	12	13	19
Blow/min (bpm)	12,000	4,000	4,000
Net Weight (kg)	1.12	2.5	2.8
OA Length (mm)	225	395	410

Air Saw & File



Model No.	Stroke (mm)	Stroke/min	Net Weight (kg)	OA Length (mm)	Std Accessories
AF-5A	5	3,500	0.38	158	blade x 2, file x 3
AF-10S	10	5,500	0.75	201	blade & file x 3
APS-30	30	500 - 1,800	1.59	364	blade x 3

Screw Driver - Compact & Powerful



Model No.	Bolt Capacity	Max Torque	Free Speed	Net Weight	OA Length
MV-6216B	6 mm	0.9 kg-m	1,800	1.2 kg	250 mm
MV-6226B	6 mm	1.2 kg-m	1,800	1.3 kg	205 mm
MID-50	6 mm	5.0 kg-m	10,000	0.55 kg	162 mm
MID-60	6 mm	9.8 kg-m	10,800	0.8 kg	181 mm
TW-6SD	8 mm	17.0 kg-m	6,750	1.5 kg	215 mm
MI-12D	12 mm	12.0 kg-m	9,500	1.2 kg	154 mm

Sander



Model No.	Disc Size(mm)	Action Type	Free Speed	Net Weight	OA Length
MS-4125B	75 - 115	Circular	14,000	1.0 kg	115 mm
ES-730	90 x 180	Orbital	10,000	0.95 kg	220 mm
ES-680N5/G5	125	Orbital	12,000	0.68/0.77 kg	140/210 mm
ES-680N6/G6	150	Orbital	12,000	0.73/0.82 kg	140/225 mm

Sand Rammer and Tamper




Model No.	TB-00G	TB-0G	TB-1N/TF-1N	TF-2N	T-6
Dia x Stroke	18 x 50 mm	22 x 65 mm	25 x 100 mm	32 x 125 mm	38 x 140 mm
Blow/min (bpm)	1,600	1,000	800	700	750
Net Wt (kg)	1.7	2.7	5.4 / 6.8	9.0	18.0
OA Length (mm)	280	395	510 / 1,070	1,105	1,240

Baby Hammer and Chipper



Model No.	Piston Dia.(mm)	Stroke (mm)	Blow / min	Net Weight	OA Length
MH-5111	19	66	3,500	1.6 kg	200 mm
MH-5115	19	90	2,100	2.0 kg	250 mm
BRH-3	10	76	1,800	1.4 kg	200 mm
AA-0B	20	50	3,600	2.0 kg	254 mm
AA-1.3B	24	58	2,800	4.5 kg	320 mm
AA-3B	28	79	2,400	5.8 kg	330 mm
THA-4S RV	28.54	102	1,800	7.0 kg	480 mm

Digger and Light Breaker

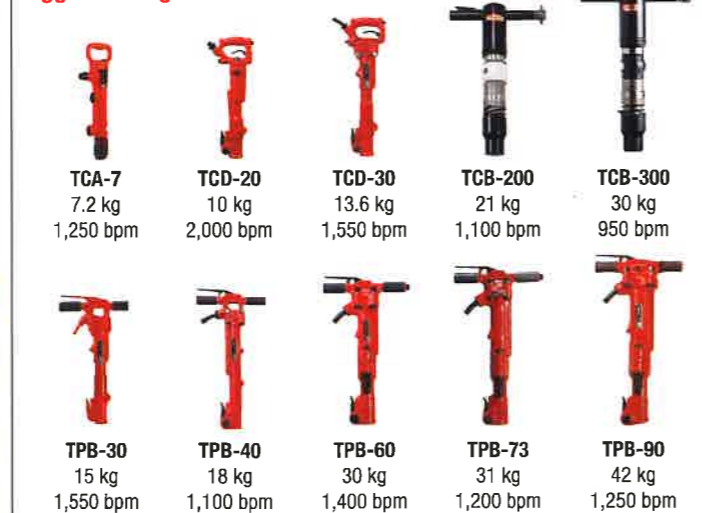

Made in Japan

Rock Drill



Model No.	TH-5S	TJ-15LBS	TJ-20LBS	TS-55	TAA-400
Net Weight (kg)	5.8	14.0	18.5	27.0	10.2
OA Length (mm)	425	507	610	568	275
Blow / min (bpm)	3,400	2,450	2,400	1,800	1,200
Taper Rod	T15 / T19	T22	T22	T22	-

Air Winch



TAW Winches designed for lifting & pulling jobs

- Compact & light weight design, rugged & durable
- Double Safety: Two brakes - auto and manual
- Free drum facility: with clutch disengaging lever

Model No.	TAW-300B	TAW-500	TAW-1000	TAW-1500A	TAW-2000
Capacity (kg)	300	500	1,000	1,500	2,000
Wire Rope (mmxm)	6 x 48	8 x 100	10 x 104	12 x 60	16 x 63
Speed (m/min)	27.0	20.0	11.5	8.5	5.7
Net Weight (kg)	42	75	90	90	130

Air Mucking Winch



- Designed and built for tank cleaning
- Built-in automatic brake
- Oil submerged gear section

Model No.	TMW-300
Capacity (kg)	300
Drum Capacity	6mm x 40m
Speed (m/min)	27
Weight with Leg Frame (kg)	109

SAN-EI Air Winch

Made in Japan



SAN-EI Air Winch are rugged and compact in design and built to work safely at difficult environment with minimum maintenance.

Model No.	W30-36 LAC-AB	W50-36 LAC-AB
Capacity (kg)	3,000	5,000
Drum Capacity	16mm x 320m	22mm x 230m
Speed (m/min)	19	11
Weight w/o rope	527 kg	873 kg

Metal Core Drilling Machine

Made in Germany



- Drills up to 100mm
- Tapping is possible for selected models



EISENBLÄTTER

Made in Germany

Poly-PTX® 800 Professional Complete Set

- Mirror finish in just 3 steps
- Hairline finishing in 1 simple step
- Variable Speed control



Varilex® WSF 1800 Professional

- Ideal for grinding and polishing application
- Can be used with flap discs, grinding and cutting discs
- Variable Speed control



Pipe-Max Pipe Belt Grinder


- Perfect grinding and polishing on closed and open pipes
- Homogeneous and uniform grinding
- Adjustable Handle for both right or left handed operator



Made in Japan

Air Chain Hoist

TOKU Air Chain Hoist are designed for onshore and offshore i.e. manufacturing and marine operations - e.g. hazardous industries, ship building & repair yards, chemical and petrol-chemical industries.

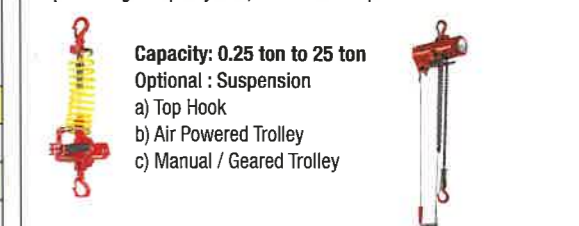

Capacity: 0.25 ton to 25 ton
Optional : Suspension
a) Top Hook
b) Air Powered Trolley
c) Manual / Geared Trolley

Features

1. Steel alloy body and built-in silencer
2. Automatic enclosed disc brake
3. Variable speed operations
4. Upper & Lower limit switches
5. Built-in Load limiters for 500 kg to 6,000 kg
6. Continuous duty air motor
7. Control: Pendant or Pull Cord
8. Compact design with low head room.



Electric Chain Hoist

Made in Germany

Capacity 0.25 ton - 25 ton

Star Liftket is the result of continuous development of Hoffmann Fordertechnik GmbH to further improve the performance of Liftket Hoist. Star Liftket incorporates a modular motor system, which is fan cooled & very suitable for hot tropical climate, providing that longer working duty cycle.

Special Features

- Horizontal Design - great for low headroom work place
- Automatic Disc Brake - direct positive brake for ultimate safety
- Capacity 250 kg - 25,000 kg: Wide selection to meet your needs
- One or two speed: Choice to suit your operational requirement
- IP-55: Protected against dust and splashing water
- Thermal Relay: Protects motor overheating and burn-out
- 24V Control System: Protects operator from high voltage
- Clutch Adjustment System: Protects accidental over loading
- Limit Switch: Stops operation at highest and lowest positions
- Galvanised Load Chain DIN Standard: Prolong chain life
- Class 'F' Motor Insulation: More durable and work harder
- Lightweight Housing Design: Easy to handle and install

We can design, build, supply, install and PE Testing & MOM Certification to meet your hoisting requirements. Call us for estimates without any obligation.

FAR Fastening Tools - Rivet and Threaded insert

Made in Italy

- K-1 Manual**
 - Rivet capacity - 2.4 mm to 4.8 mm
- RAC-171 Pneumatic**
 - Rivet Capacity: 4.8 mm to 7.8 mm* (*aluminium)
 - 4.8 mm to 6.4 mm (Stainless Steel)
 - Monobolt Capacity: 3/16" to 1/4"
- RAC-210 Pneumatic**
 - Rivet Capacity: 2.4 mm to 4.8 mm
 - 2 way nail ejection - front and rear

Other Rivet Capacity - please inquire with your specific requirements



Zeca products have world wide coverage for **PRODUCT LIABILITY**

CE Made in Italy

ZECA Retractable Air Hose Reel

Model No.	Hose Dia. (mm)	Hose Length (m)	Max Pressure (Bar)	End Pipe Fitting	Incoming Fitting	Weight (kg)
9100/6	6.0	5.5 + 1	12	1/4" M	-	2.0
AM80/8	8.0	9 + 1	15	1/4" M	-	4.5
AM85/10	10.0	15 + 1	15	3/8" M	-	8.0
AM86/10	10.0	24 + 1	15	3/8" M	1.5M	10.0
AM86/13	12.5	15 + 1	15	1/2" M	1.5M	10.0
813/8	8.0	10 + 2	12	1/4" M	1/4" M	10.5
813/10	10.0	7 + 2	12	3/8" M	3/8" M	10.5
8804	12.5	15 + 1	20	1/2" F	1/2" M	20.0
8830	10.0	14 + 1	200	3/8" F	1/2" M	20.0

ROTOZECA + Lamp

Model No.	Input Voltage	Cable Length	Lamp		Reel
			Model	Protection	
5907/328 230V	230V 1Ph	14 + 1.5m	328/230V	IP-55	IP42
5907/329 230V	230V 1Ph	14 + 1.5m	329/230V	IP-55	IP42
5907/370	230V 1Ph	14 + 1.5m	370/60W	IP65	IP42
5908/308 24V	230V 1Ph	14 + 1.5m	308/ 24V	IP-55	IP42

Retractable Cable Reels

Model No.	No. of Conductor	Voltage (V)	Conductor Section (mm²)	Meters of Coiled Cable
4315	3	230/110	1.5	14 + 1
5822/XF	4	400	2.5	5.5 + 1.5
5825/XF	3	230/110	2.5	7 + 1.5
5834/XF	1	-	6.0	12.5 + 1.5
5838/XF	8	-	8.0	5.5 + 1.5
7315	3	230/110	1.5	25 + 2
7325	3	230/110	2.5	20 + 2
7525RNF	5	400	2.5	10 + 2

Air Treatment System - Filter Regulator Lubricator (FRL)

Installation of Air Treatment System (FRL) in your air supply system is strongly recommended to provide protection for your air tools and other air powered equipment for longer and trouble-free operations.



Size Code	20	30	40	50	60
Air Inlet (inch)	1/4"	3/8"	1/2"	3/4"	1"
Max Flow (L/min)	800	1,500	3,000	6,000	7,000
Max Ops Pressure	1.0MPa / 10 Bar				
Temp. Range	- 5°C to 50°C				
Weight (FRL)	0.73 kg	1.0 kg	1.34 kg	4.20 kg	4.34 kg

EM2 Abrasives

Flap Wheel with Shank
Fan shaped abrasive mops for contoured metal surface grinding or finishing

Flap Wheel
For stainless steel grinding, polishing for hairline or after welding

Sanding Disc
Sanding paper disc of excellent performance on most surface with consistent quality finishing

Finishing Wheel
Full nylon flaps or with abrasive cloth combination for buffing and surface finishing

Flap Disc
Constant stock removal, grinding of stainless steel, mild steel, aluminium, copper after welding

JUMBOZECA Art No. 673
Portable Exhaust Gas Extractor

Allow the mechanic to work on the vehicle with the engine running without causing air pollution

- Easy to adjust height and suction setting
- Its quick fit collar allows easy disconnection when moving from one location to another



Hose Reel



Cable Reel + Lamp
Output 24V or 230V



STRIP LAMP Art No. 344
LED Rechargeable Lamp



- Super Bright (360 lumen)
- Handy and Rugged (IP65)
- 3 hours run time

Valve Grinder Art No. 209



• An essential air grinder in any workshop for a quick valve grinding

NKC Quick Couplers

Made in Japan

Socket			Plug		
Std Code	Hose Size(in)	SH (Hose Nipple)	Std Code	Hose Size(in)	PH (Hose Nipple)
22SH	1/4		22PH	1/4	
23SH	SS 3/8		23PH	3/8	
24SH	SS 1/2		24PH	1/2	
44SH	1/2		44PH	1/2	
46SH	3/4		46PH	3/4	
Std Code	Thread Size(in)	SM (Male Thread)	Std Code	Thread Size(in)	PM (Male Thread)
22SM	1/4		22PM	1/4	
23SM	3/8		23PM	3/8	
24SM	SS 1/2		24PM	1/2	
44SM	1/2		44PM	1/2	
Std Code	Thread Size(in)	SF (Female Thread)	Std Code	Thread Size(in)	PF (Female Thread)
22SF	1/4		22PF	1/4	
23SF	3/8		23PF	3/8	
24SF	1/2		24PF	1/2	

Air Vacuum Gun Kit
ZK-0206BK



Light Weight design, easy for operation

NL-P-2

One To Two Line Connector



TUCANO Air Duster

Ergonomics Design suitable for long term use



Industrial Brushes

Steel Wire Wheel Brushes (Flexible Type)
Material: Steel, Brass coated or stainless Steel type

Dish Brushes
Provide aggressive cleaning action in corners

Cup Brushes (Flexible Type)
CC - For Electric tool
CCO - For Air tool

Wire Brushes with shank
For use on drills and high speed electric tools

End Brushes
For use on drills and high speed electric tools



SURFACE PREPARATION TOOLS

CE Made in England

Chisel Scaler (-C)



Model No.	ISSA Code	IMPA Code	Weight (kg)	Blow / Min	Length (mm)	Std Attach
1B - C	55.091.02	59 05 81	1.6	3,800	313	704.2105
2B - C	55.091.06	-	2.0	3,000	343	704.2105
2BPG - C	55.091.11	59 05 82	2.1	3,000	260	704.2105
3BPG - C	55.091.21	59 05 83	2.6	2,200	339	704.2105
4B - C	55.091.21	59 05 84	4.0	2,200	440	704.2105

Needle Scaler (-N)



Model No.	ISSA Code	IMPA Code	Weight (kg)	Blow / Min	Length (mm)	Std Attach
1B - N	55.091.01	59 04 81	1.7	3,800	343	3 mm x 12
2B - N	55.091.05	59 04 82	2.6	3,000	375	3 mm x 19
2BPG - N	55.091.10	59 04 82	2.6	3,000	315	3 mm x 19
3BPG - N	55.091.20	59 04 83	3.8	2,200	342	3 mm x 28
4B - N	55.091.20	59 04 84	5.9	2,200	482	3 mm x 49
VL-303	55.091.40	59 05 10	3.5	3,000	370	3 mm x 28

VL-303 Vibro-Lo Needle Scaler
Noise level : 109.5 dBA
Vibration Level Aeq : 2.3 m/s²
Very Low vibration, greatly reduce worker's hand fatigue

Needle
Available in diameter 2 mm, 3 mm & 4 mm

Spark Proof Needle (Beryllium Copper)
BS-2873 & ATEX - CE Standard

50mm width chisel 704.1110 (Aluminium Bronze)

Scaling Hammer



Very Low Vibration: VL SH-1H



Model No.	Part No.	IMPA Code	Weight (kg)	Blow / Min	Length (mm)	Type of Head
SF-1	151.5100	59 03 82	2.5	3,800	460	Taper/Carbide
VL SH-1H	196.5100	59 03 82	2.5	3,000	465	Integral/Carbide
SF-1	151.5180	59 03 82	2.5	3,800	485	Integral/Steel
SF-3	153.5300	59 03 83	3.7	3,000 x 3	460	Taper/Carbide
SH-3H	153.5200	59 03 83	5.3	2,300 x 3	460	Integral/Carbide
SF-3	153.5380	59 03 83	3.7	3,000 x 3	485	Integral/Steel

Multi Planner - Large Area Descaler

The ridged steel chasis ensures a strong, stable machine suitable for accurate surface preparation of concrete & steel surfaces, removing coatings, levelling and texturing.



Model No.	Power Type	Cut Width	ISSA Code	IMPA Code	Weight (kg)
TFP-200 E	110V 1ph 60Hz	200 mm	55.096.05	59 22 35	72
TFP-200 E1	220V 1ph 50/60Hz	200 mm	55.096.02	59 22 36	71
TFP-200 E2	415V 3ph 50/60Hz	200 mm	55.096.02	59 22 37	68
TFP-200P	Petrol Engine	200 mm	55.096.01	-	59
TFP-200D	Diesel Engine	200 mm	-	-	56
TFP-200A	Air Motor (Air cons. 5m³/min)	200 mm	-	59 22 31	63
TFP-250 E2	5.5Hp/4kw (Electric Motor)	250mm	-	-	127
TFP-250P	8Hp/6kw (Honda Engine)	250mm	-	-	122

Multi-Heads Scaling Machine - 11 pistons

Multi-Head Scaling Machine - 11 pcs replaceable Tungsten Carbide Pistons vibration reduced mounting for comfortable operation. Suitable for removing road markings, floor paint or coatings, rust on ship deck, etc.

Model No.	Suitable	ISSA Code	IMPA Code	Weight (kg)	Blow / Min
SF-11	Steel	55.095.01	59 04 05	36	3,000 x 11
MHS-5	Concrete	-	-	114	1,300 x 5
MHS-11	Concrete	-	-	70	2,200 x 11

Hydrflex: Water Jet - Stainless Steel Gun

Specially designed for cleaning Cargo Hold of carriers and vessels. Water jet can reach to a height of 30m.

Air Pressure: 100 psi-inlet 3/4"
Air Consumption: 2m³/min
Water Pressure: 85 psi - 2" or 2-1/2"
Water Consumption: 485L/min
Wt with Tripod stand: 15 kg

Peening Tools - Handheld Scarifier (Pneumatic/Electric)

Ideal for the removal of:

- Alkyds
- Mastics
- Adhesives
- Lead based paints
- Coatings corrosion

2" Star Cutter Hub Assembly

Vacuum System Operated by Air/Electric

Portable collector of hazardous dust and debris including asbestos

Trident Neptune - Deck De-scaler



Electric Motor Type :
Dual Voltage: 110V or 220V
Dual Frequency: 50/60 Hz
Weight: 34 kg

Suitable for rapid removal of rust & old paint. Surface preparation for coating application.

Air Motor Type:
Air pressure: 6 kg/cm²
Weight: 34 kg

Long Reach Scaler

Chisel Width - 2", 4", 8" & 12"
Spark Resistant Chisel on request
Option: Long Reach Needle Scaler



Model No.	ISSA Code	IMPA Code	Length (mm)	Weight (kg)	BPM
LR-2	55.094.01	59 04 51	740 (2")	4.8	2,200
LR-5	55.094.03	59 04 53	1400 (5")	6.25	2,200
LLR-5	LITE - Light Weight Version		1400 (5")	4.05	2,200

Heavy LR Scabbler - LRS-55

For hacking hard concrete surfaces in confined areas
Weight: 13.4 kg
Length: 1,392 mm