

В	
BHX250	36
C	
CF100DZ	63
CF101DZ	63
CL100DW / DZ	19
CL100DWX / DZX	19
CL102DWX / DZX	19
CL105DW / DWR / DWX	19
CL106FDSA / FDZ	19
CL106FDSAW / FDZW	19
CL107FDSAW / FDZW	19
CL107FDZ / FDSA	18
CL108FDSA / FDSAW / FDSM /	18
FDSMW / FDZ / FDZW	
CL121DSAX1 / DZ	20
CV101DZ2XL/DZL/DZM/DZXL	65
D	
DCF102ZX1 / Z	63
DCF203Z	62
DCF300Z	62
DCJ205Y2XL/YXL/YL/YM	65
DCJ206Y2XL/YXL/YL/YM	65
DCL180FZW / FRFW / FRTW / FRGW	17
DCL180Z / ZB / RT / RTE	17
DCL181FZW / FAW1 / FGW1	17
DCL182ZB / ZW	17
DCL280FRGW / FZW	17
DCL281FRGW / FZW	17
DCL282FRAW / FZW	17
DCL501Z	20
DCS231T	39
DCS9010-76	39
DCU180Z	31
DCV200Z2XL / ZXL / ZL / ZM	65
DCV202Y2XL/YXL/YL/YM	65
DFJ202Z2XL / Z3L / ZL / ZLL / ZXL	65
DFJ203Z3L / ZL / ZLL / ZM	65
DFJ210ZL / ZM / ZXL	65
DFJ211ZL / ZM / ZXL	65
DFJ212ZL / ZM / ZXL	64
DFJ213ZL / ZM / ZXL	64
DFJ214Z2XL / ZL / ZM / ZXL	64
DFJ300Z2XL/Z3L/ZL/ZLL/ZM/ZXL	64
DFJ301Z3L / ZL / ZLL / ZM	64
DFJ310ZL / ZM / ZXL	64
DEJ3117L / 7M / 7XI	64

D	
DFJ400Z2XL / ZL / ZXL	64
DFJ401Z3L / ZL / ZLL	64
DFJ410ZL / ZM / ZXL	64
DFJ411ZL / ZM / ZXL	64
DFV210ZL / ZM / ZXL	65
DHW080ZK	60
DJR183RTE / Z	58
DLM380RF2	33
DLM382Z	33
DLM431PM2 / Z	33
DLM432Z	33
DLM460Z	33
DLM462Z	32
DLM530Z	32
DLM532Z	32
DML185	64
DML801	63
DML805	63
DML806	63
DML808	63
DML815	63
DMP180	61
DRC200Z	14
DTW1001RTJ / Z	58
DUB182Z DUB184Z	36 35
DUB362PG2 / PT2 / Z	35
DUB363PG2ZV / ZV	34
DUC122Z	38
DUC254Z	38
DUC302Z	38
DUC306ZB	38
DUC353ZB / Z	37
DUC355Z	37
DUH502Z	40
DUH523RF / SF / Z	40
DUH601Z	40
DUH651Z	40
DUH751Z	40
DUH754SZ	40
DUM604Z	43
DUP361PT2N / ZN	44
DUP362PT2N/ZN	44
DUR181RF / Z	46
DUR184LRTE / LZ	45
DUR187LZ	45





D	
DUR189Z	45
DUR364LZ	45
DUR365UZ	45
DUR366LZ	45
DUR368LZ	45
DUR369LZ	44
DUX60Z	47
DVC150LZ	14
DVC151LZ	14
DVC153LZ	14
DVC154LZ	14
DVC155LZX2	14
DVC157LZX3	14
DVC261ZX17	13
DVC660ZX7	13
DVC750LZX1	20
DVC861LZ	15
DVC862LZ	15
DVC863LZ	15
DVF104Z	61
DVF154Z	61
E	
EA3110T-30	39
EA3110T-30 EA3201S35B / S40B	39 39
EA3201S35B / S40B	39
EA3201S35B / S40B EA4301F45B / FX1	39 39
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E	39 39 39
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E	39 39 39 39
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH	39 39 39 39 39
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH	39 39 39 39 36 36
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R	39 39 39 39 36 36 46
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U	39 39 39 39 36 36 46 46
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W	39 39 39 39 36 36 46 46 42
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W	39 39 39 39 36 36 46 46 42 42
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX	39 39 39 39 36 36 46 46 42 42 42
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W	39 39 39 39 36 36 46 46 42 42 42 42
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320	39 39 39 39 36 36 46 46 42 42 42 42 34
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720	39 39 39 39 36 36 46 46 42 42 42 42 34 33
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121	39 39 39 39 36 36 46 46 42 42 42 42 34 33 33
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121 ELM4620	39 39 39 39 36 36 46 46 42 42 42 42 34 33 33 33
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121 ELM4620 EM2600U	39 39 39 39 36 36 46 46 42 42 42 42 34 33 33 33 46
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121 ELM4620 EM2650UH / LH	39 39 39 39 36 36 46 46 42 42 42 42 34 33 33 33 46 47
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121 ELM4620 EM2650UH / LH EM2654LH	39 39 39 39 36 36 46 46 42 42 42 42 42 34 33 33 33 46 47
EA3201S35B / S40B EA4301F45B / FX1 EA6100P60E EA7900P70E EB5300TH EB7660TH EBH340R EBH340U EH5000W EH6000W EH7500S / SX EH7500W ELM3320 ELM3720 ELM4121 ELM4620 EM2650UH / LH EM2654LH EM4350RH	39 39 39 39 36 36 46 46 42 42 42 42 34 33 33 33 46 47 47

E	
EY2650H25H	42
н	
HW102	61
HW111	61
HW1200	61
HW1300	61
HW132	60
HW151	60
М	
MP100DZ	61
P	
PDC01	59
PLM4620N2	34
PM7650H	36
U	
UB1102	36
UB1103	36
UC3541A	39
UC3551A	38
UC4041A	38
UC4051A	38
UC4551A	38
UH200DW	41
UH201DSAX / DZ	41
UH353DSA / DZ	41
UH5570X	41
UH6570X	41
UH7580X	41
UM164DW	44
UM600DSYEX / DZ	44
UR100DZ	46
UR3000	46
V	
VC2510L	15
VC3210L / LX1	15

Safety Precautions

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

/// KEEP WORK AREA CLEAN.

Cluttered areas and benches invite injuries.

/// CONSIDER WORK AREA ENVIRONMENT.

Don't use power tools in damp or wet locations. Keep work area well lit. Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

/// KEEP CHILDREN AWAY.

All visitors should be kept away from work area.

Don't let visitors touch the tool or extension cord.

/// STORE IDLE TOOLS.

When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

/// DON'T FORCE THE TOOL

It will do the job better and safer at the rate for which it was intended.

/// USE THE RIGHT TOOL

Don't force small tools or attachments to do the job of a heavy-duty tool. Don't use tools for purposes not intended.

/// DRESS PROPERLY.

Don't wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

/// USE SAFETY GLASSES.

Also use face or dust mask if the cutting operation is dusty.

/// DON'T ABUSE THE CORD.

Never carry the tool by the cord or yank it to disconnect it from the socket. Keep the cord away from heat, oil, and sharp edges.

/// SECURE WORK

Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

/// DON'T OVERREACH

Keep proper footing and balance at all times.

/// MAINTAIN TOOLS WITH CARE

Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

/// DISCONNECT TOOLS

When not in use, before servicing and when changing accessories such as blades, bits and cutters

/// REMOVE ADJUSTING KEYS AND WRENCHES.

Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

/// AVOID UNINTENTIONAL STARTING.

Don't carry a plugged-in tool with a finger on the switch. Ensure switch is OFF when plugging in.

/// USE OUTDOOR EXTENSION CORDS.

When tool is used outdoors, use only extension cords intended for outdoor use.

/// STAY ALERT.

Watch what you are doing. Use common sense. Don't operate tool when you are tired.

/// CHECK DAMAGED PARTS.

Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

/// GUARD AGAINST ELECTRIC SHOCK.

Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

/// REPLACEMENT PARTS.

When servicing a tool, use only identical replacement parts.

/// VOLTAGE WARNING:

Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.

Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Net weight and dimensions may differ by the type of battery.
- Standard export color for motor housing is Makita industrial green (blue).
- Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/2003.

Warranty

Every **MAKITA** tool is thoroughly inspected and tested before leaving the factory. Subject to the following Terms and Conditions, from the date of purchase, this tool is warranty against defective materials and manufacturing defects for a period of **12 MONTHS**.

The period and conditions of our warranty as follows:

- $\textbf{1.} \ \textbf{Sales receipt must be presented when servicing or warranty is required.}$
- 2. Warranty ONLY cover tools distributed by Makita Singapore Pte. Ltd. Warranty does not cover tools purchased overseas or distributed by other countries.
- 3. This warranty is ONLY valid if the warranty registration is returned to us within 7 DAYS from the date of original purchase.

This warranty will be null & void in any of the following events during the warranty period:

- $\textbf{1.} \ The product unit has undergone repair, attempted repair, dismantle or modification in any way what so ever by any other person.$
- 2. Damage resulting from use of improper accessories, non-genuine replacement parts, disassembly, tampering, alternation and repairing in any way that affects the reliability and performance.
- 3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
- 4. Abnormal voltage or usage of generator, wrong usage not in accordance with the Operation Manual.
- 5. If the Serial Number on the tool, seal on the battery and charger has been defaced or removed.
- 6. If any information on the warranty card has been defaced, removed, altered, unreadable or unclear (date of purchase, Serial Number, etc.)
- ** Makita reserved the rights of amend conditions of warranty without prior notice. Please visit our website for Makita's Service Centre information


http://www.makita.com.sq/servicing-the-customer

Li-ion Battery & Charger Time Reference, Compatibility Chart























30min.





50 min.



70min.

Battery & Charger Time Reference Chart (in Minutes)

DC18RC (195586-8) **DC18SD** (194534-4) **DC24SC** (194164-1) DC24WA DC18SE MAKSTAR (Automotive) (194621-9) **24V** 9.6V **12V** 9.6V,12V 9.6V,12V 9.6V,12V 9.6V,12V,14.4V 9.6V,12V,14.4V Ni-MH Ni-MH Ni-MH 14.4V,18V 14.4V,18V 14.4V,18V 18V,24V 18V,24V BH2433 BH1433 BH1233C (193739-3) (193354-3) (A-37655) 3.1 22 **70 70 70** 30 BH2433:60min. DC24SC-BH2433 : 50min. BH9033/A:30min. BH2433:90min. BH2420 BH1220C *BH9020A (193736-9) (193928-0) (193590-1) 1.8 15 40 40 40 20 BH9020 (193631-3) BH9020/A: 20min. BH2420:55min. BH2420:30min.


() Part No.	* Power Display Type

MAKP	AC Power Source Kit	LXT (18V
MKP1RF182 (197974-5)	Rapid Charger (DC18RC), 2X18V-3.0Ah Batteries (BL1830B), Makpac	
MKP1RT182 (197803-2)	Rapid Charger (DC18RC), 2X18V-5.0Ah Batteries (BL1850B), Makpac	
MKP3PT182 (198182-1)	Dual Port Rapid Charger (DC18RD), 2X18V-5.0Ah Batteries (BL1850B), Makpac	
MKP3PT184 (197627-6)	Dual Port Rapid Charger (DC18RD), 4X18V-5.0Ah Batteries (BL1850B), Makpac	
MKP1RG182 (198119-8)	Rapid Charger (DC18RC), 2X18V-6.0Ah Batteries (BL1860B), Makpac	
MKP3PG182 (198081-7)	Dual Port Rapid Charger (DC18RD), 2X18V-6.0Ah Batteries (BL1860B), Makpac	
MKP3PG184 (198095-6)	Dual Port Rapid Charger (DC18RD), 4X18V-6.0Ah Batteries (BL1860B), Makpac	
MKP4PF1841 (198786-9)	Dual Port Rapid Charger (DC18RD), 4X18V-3.0Ah Batteries (BL1830B), DGA404Z, Makpac	
MKP4PT1841 (198797-4)	Dual Port Rapid Charger (DC18RD), 4X18V-5.0Ah, Batteries (BL1850B), DGA404Z, Makpac	

MAKP	AC Power Source Kit	CXII (12Vmax (1474HOX)
MKP1SY122 (197654-3)	Fast Charger (DC10SB), 2X12V max -1.5Ah Batteries (BL1016B), Makpac	Transition of the second of th
MKP1SA122 (197664-0)	Fast Charger (DC10SB), 2X12V max -2.0Ah Batteries (BL1021B), Makpac	Transition
MKP1SM122 (197640-4)	Fast Charger (DC10SB), 2X12V max -4.0Ah Batteries (BL1041B), Makpac	Transition

Makita Cordless Part Number Breakdown				
DSE	Charger (DC10WA), 2X7.2V-1.0Ah Batteries (BL7010)			
DWE	Charger (DC10WA), 2X10.8V-1.3Ah Batteries (BL1013)			
DWYE	Standard Charger (DC10WD), 2X12V max -1.5Ah Batteries (BL1016B)			
DSYE	Fast Charger (DC10SB), 2X12V max -1.5Ah Batteries (BL1016B)			
DSAE	Fast Charger (DC10SB), 2X12V max -2.0Ah Batteries (BL1021B)			
DSAJ	Fast Charger (DC10SB), 2X12V max -2.0Ah Batteries (BL1021B), Makpac			
DSME	Fast Charger (DC10SB), 2X12V max -4.0Ah Batteries (BL1041B)			
SYE	Standard Charger (DC18SD), 2X18V-1.5Ah Batteries (BL1815N)			
RYE	Rapid Charger (DC18RC), 2X18V-1.5Ah Batteries (BL1815N)			
RFE/ RF2	Rapid Charger (DC18RC), 2X18V-3.0Ah Batteries (BL1830B)			
RFJ	Rapid Charger (DC18RC), 2X18V-3.0Ah Batteries (BL1830B), Makpac			
RTE/ RT2	Rapid Charger (DC18RC), 2X18V-5.0Ah Batteries (BL1850B)			
RTJ	Rapid Charger (DC18RC), 2X18V-5.0Ah Batteries (BL1850B), Makpac			
PM2	Dual Port Rapid Charger (DC18RD), 2X18V-4.0Ah Batteries (BL1840B)			
PT2	Dual Port Rapid Charger (DC18RD), 2X18V-5.0Ah Batteries (BL1850B)			
PG2J	Dual Port Rapid Charger (DC18RD), 2X18V-6.0Ah Batteries (BL1860B), Makpac			
z	Bare Tool Only (Charger, Batteries not included)			
ZJ	Bare Tool Only, Makpac			
Mak	to Coding System Ending Alphabet			

Makita Coding System - Ending Alphabet

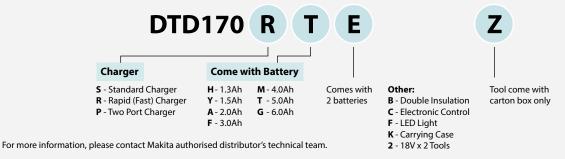



High Performance with Brushless DC Motor

Brushless DC motor

- :: Maintenance-free due to no brush
- **#** Energy production is more efficient than brushed DC motor

because of no friction loss caused by brushes, enabling to lower amperage for reduced heat production and increased work amount on a single full battery charge.

More work amount on a single full battery charge

"Thanks to the very efficient energy production of BLDC motor, work amount on a single full battory charge is increased.

single full battery charge is increased.

Life time work amount of a battery is increased, reducing the battery cost.

Durable against continuous long operation

". Use of BLDC motor lowers heat production; the temperature rise at housing surface can be recessed well even in hard industrial applications requiring continuous long

operation.



Photo: DTD171





18V X2 Lithium-ion

Powered by two 18V Li-ion batteries in series



EXPAND YOUR LITHIUM-ION LINEUP









Makita







Brushless Cordless HEPA Backpack Vacuum Cleaner



Paper dust bag : 6.0 L Cloth dust bag : 5.5 L w/BL1860B (Max/High Capacity Continuous Use (min.) /Normal): 40 / 75 / 140 Max Air Flow w/Hose complete 32-1.0: 2.2 m³/min Max Sealed Suction 11 kPa Suction Power Max/High/Normalw/

CLEANING EQUIPMENT

Hose 32-1.0:95/50/25 W Dimensions 297x174x523 mm (11-3/4"x6-7/8"x20-5/8") (LxWxH)Net Weight 6.1 - 6.7 kg (13.4 - 14.8 lbs.)



Floor Nozzle, Flexible rubber nozzle, Telescopic pipe assembly, Hose complete 28-1.0, Bent Pipe, Hose band, Filter bag (Paper dust bag) Z: Battery and Charger are sold separately

Cordless Backpack Vacuum Cleaner DVC660

High capacity tank and low noise structure

Max Air Flow

Hose : 28mm - 1.0m

Max Sealed Suction

1_{kPa}



HEPA Filter is used as the main filter to capture very fine particles effectively.

Able to capture 99.97% of particles as small as 0.3-1 µm

Exhaust air is as clean as that of air cleaner.



Cleaning mechanism for paper dust bag

Even when vacuuming concrete dust tending to clog filters, actuation of this mechanism allows to collect approximately up to 4.0L, 70% of the paper dust bag capacity. (approximately 3.0L [50%] when not actuated)





- · Automatically by the vibration due to walking
- · Manually by operating a lever by hand

Side Battery





DVC261ZX17 Cordless Backpack Vacuum Cleaner Can be used with power tools



Capacity Continuous Use (min.)

Max Air volume

/Normal):40/75/140 w/ Hose Complete 28-1.5 : 1.8 m³/min w/ Hose Complete 28-1.0 : 2.0 m³/min 11 kPa

Paper dust bag: 2.0

Cloth dust bag: 1.5 L

w/BL1860B (Max / High

Max Sealed Suction Suction Power

Max / High / Normal w/ Hose 28-1.5:85 / 45 / 25 W 230x152x373 mm (9"x6"x14-3/4") 3.8 - 4.5 kg (8.5 - 9.9 lbs.)







Net Weight



Floor Nozzle, Flexible rubber nozzle, Telescopic pipe assembly, Hose complete 28-1.0, Bent Pipe, Hose band, Filter bag (Paper dust bag) Z: Battery and Charger are sold separately



CLEANING EQUIPMENT

DRC200Z Robotic Cleaner

Provides easy maneuverability anywhere you need cleaning

Li-ion Ah 6.0 5.0 3.0 1.5



Continuous use (minutes) BL1850Bx2: 200 BL1830Bx2: 120 Max. cleanina area BL 1850Bx2: 500m BL1830Bx2: 300m²

Max. runnina speed 0.3 m/sec Dust box capacity 460x460x180mm Dimensions $(18\text{-}1/8''x\,18\text{-}1/8''x\,7\text{-}1/8'')$ Net weight 7.8kg (16.1lbs)





18V





Wireless remote controller (including two AAA alkaline batteries), Side brush, Boundary tape (15m roll), Z: Battery and Charger are sold separately

DVC157LZX3 (Dry) Cordless Vacuum Cleaner

New

18V X2 (36V) LXT BL AWS Cordless 15 L Dust Class L HEPA Vacuum Cleaner (Dry only)

Li-ion Ab 6.0 5.0 3.0 1.5



Dust/Water: 15/-L Capacity Max Air Flou 2.1 m³/min Max Sealed Suction 11 kPa Suction Power 105 W Dimensions (L x W x H) 366x334x421 mm (14-3/8"x13-1/8"x16-1/2") 8.0-8.6 kg (17.6-19.0 lbs.)

18V MARK AWS

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

DVC154LZ (Dry) Cordless Vacuum Cleaner

New

18V X2 (36V) LXT BL AWS Cordless 15 L Dust Class L HEPA Vacuum Cleaner (Dry Only)

Li-ion Ab 6.0 5.0 3.0 1.5



Capacity Max Air Flow Dust / Water: 15 / N/A L 2.1 m³/min Max Sealed Suction 9.8 kPa Suction Power 90 W 2.5 m/s² or less Vibration Level Sound Pressure Level 70 dB(A) or less 366x334x421 mm (14-3/8"x13-1/8"x16-1/2") Dimensions (L x W x H) Net weight 8.0 - 8.6 kg (17.6 - 19.0 lbs.)

18V MARKET AWS

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC151LZ (Dry) Corded and Cordless Vacuum Cleaner

Corded / 18V X2 (36V) LXT Li-lon Cordless 15 L Dust Class L Vacuum Cleaner (Dry Only) 353 July



Dust/Water: 15/N/AL Capacity Max Air Flow AC/DC: 3.6/2.1 m³/min Max Sealed Suction AC/DC:24/9kPa Suction Power AC/DC:320/25-70W Vibration Level 2.5 m/s² or less Sound Pressure Level 75 dB(A) 366x334x421 mm Dimensions (L x W x H) (14-3/8"x13-1/8"x16-1/2") Net weiaht 9.6 - 10.3 kg (21.2 - 22.6 lbs.)

18V 3 36V

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Powder Filter, Tool Box, Connection cord (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

DVC155LZX2 (Wet & Dry) **Cordless Vacuum Cleaner**

18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry)

Li-ion Ah 6.0 5.0 3.0 1.5

Dust/Water: 15/12L Capacity Max Air Flow 2.1 m3/min Max Sealed Suction 11 kPa Suction Power 105 W Dimensions (L x W x H) 366x334x421 mm (14-3/8"x13-1/8"x16-1/2") 7.3 - 7.9 kg (16.1 - 17.4 lbs.)

18V 36V BL XPT

Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC153LZ (Dry) Cordless Vacuum Cleaner

New

18V X2 (36V) LXT BL Brushless Cordless 15 L Dust Class L HEPA Vacuum Cleaner (Dry Only)

Li-ion Ab 6.0 5.0 3.0 1.5



Capacity Max Air Flow Dust/Water: 15/N/AL 2.1 m³/min Max Sealed Suction Suction Power 9.8 kPa 90 W 2.5 m/s² or less Vibration Level Sound Pressure Level 70 dB(A) or less 366x334x421 mm (14-3/8"x13-1/8"x16-1/2") Dimensions (L x W x H) Net weiaht 8.0 - 8.6 kg (17.6 - 19.0 lbs.)

18V MAR & 1 1 100 36V BL XPT

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Hose (28mm-3.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC150LZ (Wet & Dry)

New

Corded / 18V X2 (36V) LXT Li-Ion Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry) 353 JWW



Dust/Water: 15/12L Capacity Max Air Flow AC/DC: 3.6/2.1 m³/min Max Sealed Suction AC/DC:24/9kPa AC/DC: 320/25 - 70 W 2.5 m/s² or less Suction Power Vibration Level Sound Pressure Level 75 dB(A) 366x334x421 mm Dimensions (L x W x H) (14-3/8"x13-1/8"x16-1/2") Net weiaht 8.9 - 9.6 kg (19.7 - 21.1 lbs.)

1 1 100, ≠ 100, ≯ 367

or Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, th Filter, Tool Box, Connection cord (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

CLEANING EQUIPMENT

DVC863LZ (Dry)

LXT BL Brushless Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Dry Only)



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction Suction Power Sound Pressure Level Dimensions (LxWxH)

Net Weight

Dust: 8L With BL1850B x 2: 40 2.1 m³/min 90 W 70 dB(A) or less 366x334x368 mm (14-3/8"x13-1/8"x14-1/2") 7.7 - 8.4 kg (17.1 - 18.4 lbs.)

DVC862LZ (Wet & Dry)

LXT BL Brushless Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)



Capacity Continuous Use (min.) Max Air Flow Dust/Water: 8/6 L With BL1850B x 2: 40 2.1 m³/min 9.8 kPa DVC862L: 80 W Max Sealed Suction Suction Power DVC863L: 90 W Dimensions 366x334x368mm (14-3/8"x13-1/8"x14-1/2") DVC862L: 7.2 kg (15.9 lbs) (L x W x H) Net Weight DVC863L: 7.9 kg (17.4 lbs.)











Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger

100 + 100 36V XPT BL

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger



DVC861LZ(Dry)

Corded and Cordless Vacuum Cleaner

LXT Li-Ion Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Dry Only)



353 WW With BI 1850B x 2:65 Continuous Use (min.) Max Air Flow AC/DC: 3.6/2.1 m AC / DC: 24 / 9 kPa Max Sealed Suction AC/DC: 320/25 - 70 W Suction Power Dimensions (14-3/8"x13-1/8"x14-1/2") $(I \times W \times H)$ 9.3 - 9.9 kg (20.5 - 21.8 lbs.) Net Weight





Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Powder Filter, Tool Box, Connection cord (country-specific), Battery, Charger

DVC860LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner

LXT Li-lon Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction Suction Power Dimensions (L x W x H) Net Weight

Dust / Water: 8 / 6 L With BL 1850B x 2: 65 AC/DC: 3.6/2.1 m3 /min AC/DC: 24/9 kPa

AC/DC: 320/25 - 70 W 366x334x368mm (14-3/8"x13-1/8"x14-1/2") DVC860L: 8.6 kg (19.0 lbs) DVC861L: 9.3 ka (20.5 lbs)

VC3210L / LX1 Vacuum Cleaner (Wet & Dry)

Complying with dust class L



Continuous Rating Input 1,050W Max Peak Air Ow 2.0m³/min Max Sealed Suction 22.0 kPa (2,240 mmH₂O) (Water Column) Tank Capacity Dust: 32 L Water: 27 L Dimensions (L x W x H) 552x398x685mm (21-3/4"x15-5/8"x27")

14.5kg (32.0lbs)

Power Supply Cord 5.0m (16.4ft) VC3210LX1

Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Poly Bag Set

18V 🗖 🌇 🚜





Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), Battery, Charger

VC2510L Vacuum Cleaner (Wet & Dry)

Complying with dust class L



Continuous Rating Input 1,050W 2.0m³/min Max Peak Air Ow Max Sealed Suction 22.0 kPa (Water Column) $(2,240 \text{ } \text{mmH}_2\text{O})$ Tank Capacity

Dust: 25 L Water: 14 L 432x416x451mm Dimensions (LxWxH) (17"x16-3/8"x17-3/4") 10.5ka (23.2lbs) Net Weiaht Power Supply Cord 5.0m (16.4ft)



Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Plastic Dust Bag Set



Thakita Cleaners

Cordless Cleaner DCL280F / DCL281F / DCL282F



Pipe lock

Pipe is fixed with the locking mechanism to prevent it from accidentally coming off.

Pipe with beveled end

Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle.

















Capsule type (DCL280F / DCL281F)



When capsule is installed securely, two ribs inside capsule press the inside frame of filter to hold the filter tight.









DCL282FRAW / FZW Cordless Cleaner

New

18V LXT BL Brushless Cordless 3-Speed Cleaner with LED Light



Normal Dust Bag: 500 Capacity Paper Filter: 330 Continuous Use (min.) Max: 15 High: 20 Normal: 50 1.5 m³/min Max Air Flow Max Sealed Suction 8.2 kPa (820 mmH₂O) (water column)
Dimensions (LxWxH)

1,016x114x154 mm (40"x4-1/2"x6-1/16") 1.3 - 1.6 kg (2.8 - 3.5 lbs.) Net Weiaht

18V 🥞 🔆 LXT 🔧

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Long Sash Nozzle, Holder, Filter, Prefilter, Easy Shake Off Filter, Hand Strap, Battery, Charger

DCL281FRGW / FZW Cordless Cleaner

18V LXT BL Brushless Cordless 3-Speed Cleaner with LED Light



750 mL Capacity Continuous Use (min.) Max: 15 High: 20 Normal: 50 Max Air Flow 1.5 m³/min Max Sealed Suction 8.2 kPa (820 mmH₂O) (water column) 1,016x113x154 mm (40"x4-7/16"x6-1/6") Dimensions (LxWxH)

CLEANING EQUIPMENT

Net Weight 1.2 - 1.6 kg (2.7 - 3.5 lbs.)

18V 🥞 🔆 **B** 4 3 LXT.

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Long Sash Nozzle, Holder, Filter, Prefilter, Easy Shake Off Filter, Hand Strap, Battery, Charger

DCL280FRGW / FZW Cordless Cleaner

New

18V LXT BL Brushless Cordless Cleaner with LED Light



750 mL Capacity Continuous Use (min.) Max Air Flow 1.4 m³/min Max Sealed Suction 6.4 kPa (640 mmH₂O) (water column) Dimensions (LxWxH) 1,016x113x155 mm (40"x4-7/16"x6-1/8") 1.2 - 1.6 kg (2.7 - 3.5 lbs.) Net Weiaht

18V 🔆 LXT BL 4 3

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Long Sash Nozzle, Holder, Filter, Prefilter, Easy Shake Off



DCL182ZB / ZW Cordless Cleaner





Capacity Dust Bag: 500 mL Paper Pack: 330 mL Continuous Use (min.) with BL1850B (High): 33 with BL1850B (Low): 66 May Air Flow 1.4 m³/min 5.4 kPa Max Sealed Suction (water column) (551 mmH2O) 1,004x115x151 mm **Dimensions** (LxWxH) (39-1/2"x4-1/2"x5-15/16") 1.3 kg (2.8 lbs) Net Weight

Nozzle Assembly, Sash Nozzle, Pipe, Filter (Factory-mounted), Pre-filter (Factory-mounted), Z: Battery and Charger are sold separately

Nozzle Assembly, Sash Nozzle, Pipe, Filter (Factory-mounted), Pre-filter (Factory-mounted), Z: Battery and Charger are sold separately

DCL181FZW / FAW1 / FGW1 Cordless Cleaner

18V LXT Li-Ion Cordless Cleaner



Capacity Continuous Use (min.) 650 mL with BL1830B (High): 20 with BL1830B (Low): 40 Max Air Flow 1.4 m³/min Max Sealed Suction 5 3 kPa (water column) (540 mmH2O) Dimensions (LxWxH) 999x114x152 mm (39-1/4"x4-1/2"x6") Net Weight 1.2 kg (2.7 lbs.)

DCL181FAW1/ FGW1 DCL181FZW 18V 2 × LXT 1

Floor T-Nozzle28, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter, Z: Battery and Charger are sold

DCL180FZW / FRFW / FRTW / FRGW Cordless Cleaner

DCL180Z / ZB / RT / RTE Cordless Cleaner

Optimum cordless cleaner for constructors or factory



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) (LxWxH)

650 mL with BL1830B: 20 1.4 m³/min 4.2 kPa (428 mmH2O) 999x114x152 mm (39-1/4"x4-1/2"x6") 1.2 kg (2.7 lbs)

Optimum cordless cleaner for constructors or factory



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) Dimensions (LxWxH)

650 mL with BL1830B: 20 1.4 m³/min 4.2 kPa (428 mmH2O) 999x114x152 mm (39-1/4"x4-1/2"x6") 1.2 kg (2.7 lbs)

18V **23** * LXT





Nozzle Assembly, Sash Nozzle, Pipe, Filter (Factory-mounted), Pre-filter (Factory-mounted), Z: Battery and Charger are sold separately



area.



with battery capacity warning lamp (CL108FD / CL107FD)



Ingenious swivel joint always keeps the vacuum head as close to the floor surface as possible even when cleaning tight places such as beneath sofas.



Fast Charging

CL108FDSA / FDSAW / FDSM / FDSMW FDZ / FDZW Cordless Cleaner

Lightweight and High Power



Capacity Continuous Use (min.)

Max Air Flow Max Sealed Suction (water column) (LxWxH)

with BL1016B: Max/High/Normal: 10/12/25 1.2 m3/min (445mmH2O) 956x110x150 mm (37-5/8"x4-5/16"x5-7/8") 1.0 - 1.2kg (2.3 - 2.7 lbs.)

CL107FDZ / FDSA Cordless Cleaner

12Vmax CXT Li-lon Cordless Cleaner



Capacity

Continuous Use (min.) Max Air Flow

Max Sealed Suction (water column) Dimensions (LxWxH) . Net Weight

Dust Bag: 500 mL Max: 20 / High: 24 / Normal: 50 1.4 m³/min 5.0 kPa (510 mmH2O) 960x112x150 mm (37-3/4"x4-3/8"x5-7/8")

1.1 - 1.3kg (2.5-2.9 lbs.)

12V_{max} 🥞 ※ **€** XT 2



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Dust Bag, Paper Dust Bag. Z: Battery and Charger are sold separately

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter, Battery, Charger Z: Battery and Charger are sold separately

CLEANING EQUIPMENT

CL107FDSAW / FDZW Cordless Cleaner

12Vmax CXT Li-lon Cordless Cleaner



Dust Bag: 500 mL Capacity Paper Pack: 330 mL Max: 20 / High: 24 / Continuous Use (min.) Normal: 50 Max Air Flow 1.4 m³/min (510 mmH2O)

Max Sealed Suction (water column) 960x112x150 mm (37-3/4"x4-3/8"x5-7/8") Dimensions (LxWxH)1.1 -1.3kg (2.5 - 2.9 lbs.)







Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Dust Bag, Paper Dust Bag. Z: Battery and Charger are sold separately

CL106FDSA / FDZ Cordless Cleaner

12Vmax CXT Li-Ion Cordless Cleaner



Capacity 600 mL Continúous Use (min.) with BL1041B: 42 Max Air Flow 1.3 m³/min Max Sealed Suction 3.1 kPa (water column) (316 mmH2O) Dimensions 958x100x150 mm (37-3/4"x3-15/16"x5-7/8") (LxWxH) . Net Weight 1 - 1.1 kg (2.1 - 2.5 lbs.)







Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Filter, Prefilter Z: Battery and Charger are sold separately

CL106FDSAW / FDZW Cordless Cleaner

12Vmax CXT Li-lon Cordless Cleaner



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) Dimensions (LxWxH) Net Weiaht

600 mL with RI 1041R-42 1.3 m³/min 3.1 kPa (316 mmH2O) 958x100x150 mm (37-3/4"x3-15/16"x5-7/8") 1 - 1.1 kg (2.1 - 2.5 lbs.)

12V_{max} - **€ € X T**



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Filter, Prefilter

4

CL105DW / DWR / DWX Cordless Cleaner

20W High suction power in Turbo mode



Capacity Dust Bag: 500 mL Paper Pack: 330 mL Turbo / High / Low: Continuous Use (min.) 7/10/20 1.3 m³/min Max Air Flow Max Sealed Suction 3.2 kPa (326 mmH2O) (water column) Dimensions 983x113x136 mm (LxWxH) (38-3/4"x4-7/16"x5-3/8") Net Weight 1.1 kg (2.3 lbs)





CL100DWX / DZX Cordless Cleaner

Charger DC1001(Charging time: 180 min. [approx]), Nozzle Assembly, Sash Nozzle, Sash Nozzle Holder, Pipe, Cloth Dust Bag, Paper Dust Bag

CL102DWX / DZX Cordless Cleaner

20W High suction power in Turbo mode



4

10.8V 2

Capacity Continuous Use (min.) May Air Flow

Max Sealed Suction (water column) Dimensions (LxWxH) Net Weight

Cloth dust bag: 500mL Paper dust bag: 330mL High: 13, Low:21 (with BL 1013) 0.9m3/min 2.7kPa (270mm H2O) 984 x 113 x 150mm (38-3/4"x4-7/16"x5-7/8") 1.1kg (2.4lbs) (with BL 1013)

Lightweight but with strong suction power (14W)



Capacity Continuous Use (min.) 600 mL 1.2m³/min Max Air Flow Max Sealed Suction 2.3 kPa (235 mmH2O) 966 x 103 x 150mm (water column) Dimensions (LxWxH) Net Weight (38-1/32" x 4-1/16" x 5-7/8") 0.88kg (1.94lbs)

Battery Charger, Battery Cartridge, Nozzle Assembly, Sash Nozzle, Pipe, Filter (factory-mounted), Pre-filter (factory-mounted). Z: Battery and Charger are sold separately

Nozzle Assembly(T-nozzle), Sash Nozzle, Pipe(Extension Pipe), Sash Nozzle Holder, Cloth Dust Bag, Paper Dust Bag 5 Units. Z: Battery and Charger are sold separately



CL100DW / DZ Cordless Cleaner

Lightweight but with strong suction power (14W)



Capacity 600 mL Continuous Use (min.) Max Air Flow 1.2m³/min Max Sealed Suction 2.3kPa (235 mmH2O) (water column) Dimensions 966 x 103 x 150mm (38-1/32" x 4-1/16" x 5-7/8") (LxWxH) 0.88kg (1.94lbs) Net Weight

Battery Charger, Battery Cartridge, Nozzle Assembly, Sash Nozzle, Pipe, Filter (factory-mounted), Pre-filter (factory-mounted). Z: Battery and Charger are sold separately

CLEANING EQUIPMENT



DVC750LZX1 Cordless Portable Vacuum Cleaner

7.5 L Dust Class L HEPA Portable 2-Speed Vacuum Cleaner (Wet & Dry)



Dust/Water: 7.5/4.5 L Capacity Continuous Use (min.) w/BL1850B (High): 30 w/BL1850B (Normal): 60 Max Air Flow High: 1.6 m³/min Normal: 1.3 m³/min Max Sealed Suction High: 6.7 kPa Normal: 4.2 kPa Suction Power High: 50 W Normal: 25 W

Dimensions (LxWxH) 418x251x278 mm (16-1/2"x9-7/8"x11") Net weight 4.3 - 4.6 kg (9.4 - 10.1 lbs.)

18V 2 XT

Hose, Floor Nozzle, Sash Nozzle, Shoulder Belt, Round Brush, Shelf Brush, Joint, Battery, Charger

DCL501Z Cordless Cyclone Cleaner





Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) (LxWxH) Net Weight

with BL1860B (High): 35 with BL1860B (Low): 77 1.2 m³/min (1020 mmH2O) 352x189x252 mm (13-7/8"x7-7/16"x9-7/8") 3.1 kg (6.8 lbs.)

Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook



Cordless Cleaner CL121D



Ideal for interior cleaning



Continuous Use

with BL1041B

27/32/67 min Max / High / Normal

Max Air Flow

Max Sealed Suction

Dust Capacity

with dust bag

500 mL

Paper Pack: 330mL

1.3 m³/min

4.6 kPa (470 mmH₂O)

CL121DSAX1 / DZ Cordless Cleaner

12Vmax CXT Li-Ion Cordless 3-Speed Cleaner



12V_{max} [3] (<u>XT</u> 1



Dust Bag: 500 mL Paper Pack: 330 mL Continuous Use Hiah: 32 w/BL1041B) (min.) Normal: 67 1.3 m³/min Max Air Flow Max Sealed Suction 4.6 kPa (470 mmH₂O)

Max: 28 W Hiah: 19 W Normal: 5 W Dimensions (LxWxH) 345x138x202 mm (13-5/8"x5-7/16"x8") 1.7 - 1.8 kg (3.7 - 4.0 lbs.)

Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

(water column) Suction Power

Net Weight





Cyclone pre-separation system separates dust from air.

Easy disposal of the fine dust collected in dust case

The main unit of the cleaner requires much less frequent dust disposal.

ACCESSORIES (CLEANING EQUIPMENT)

Cyclone attachment



lcon



Variable Speed

Brake

Reversing

Mechanical 2-Speed

Mechanical 3-Speed

Electronic 2-Speed

Electronic 3-Speed Electronic 4-Speed

Keyless Chuck

Torque Setting 6

Torque Setting 9

Torque Setting 16

Torque Setting 18

Torque Setting 20

Torque Setting 21

Dust Collection

Torque Limiter

Constant Speed

Soft Start

Bevel Cutting 45 left

Bevel Cutting L45 R5

Bevel Cutting 45 LR

Makita Shank Jig Saw Blade

Bayonet Shank Jig Saw Blade

Laser Marker

Orbital Cutting

Hook & Loop

Depth Adjustment

Sequential and Bump-fire

Auto Firing Stop

Automatic Oiling

Stainless Tank

Wooden Carrying Case

Chain Brake

Anti Vibration

Revolving Hose

Static Free Hose

Primer Pump

SDS-PLUS Shank

SDS-MAX Shank

17mm Hex Shank

21mm Hex Shank

28.6mm Hex Shank

30mm Hex Shank

Capacitor Discharge Ignition

Decompression Valve

Auto Decompression

Electronic Ignition

Rapid Start

Built-in Job Light

Carrying Case



www.makita.com.sg

TRADEMARKS















Makita Corporation and its affiliates (collectively referred to as "Makita") are the registered owners of the above trademarks and own the exclusive rights to these trademarks. A party who manufactures, advertises, offers for sale, sells, distributes, imports or exports power tools, batteries and/or related accessories using a trademark which is identical or similar to our trademarks may have infringed our trademarks. Makita take a serious view of trademark infringement and will not hesitate to take any legal action against any party who infringes our trademark rights.


Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711







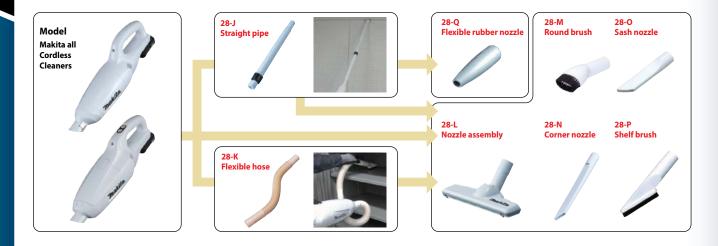

For Cordless Cleaner 28-J Straight pipe



Description	Color	Part No.
Telescopic pipe assembly 28 Pipe length is variably adjustable from 500 to 850mm.	White	123584-2
Pipe 28	Ivory	451424-7
	White	451241-5
	Blue	451244-9
	Red	451425-5
	Black	456587-4




28-K Flexible hose set 28	1	1	1

Description	Color	Part No.
	Ivory	191496-7
Flexible hose set 28	White	198867-9
Superior in flexibility and for the	Blue	198541-9
cleaning of the small place in the car	Red	198542-7
	Black	198543-5

Description	Color	Part No.
Floor / carpet t-nozzle For rug / carpet cleaning	lvory	A-59922
	White	A-59950
	Blue	198523-1
	Red	A-59938
	Black	198526-5







Description	Color	Part No.
Floor t-nozzle 28	lvory	123485-4
	White	123486-2
	Blue	123488-8
	Red	123489-6
	Black	123539-7



Description	Color	Part No.
For rug / carpet cleaning	lvory	122291-4

28-O Sash nozzle 28 and Long Sash nozzle 415 Sash nozzle 28



Long sash nozzle 415



Description	Color	Part No.
Sash nozzle 28	lvory	416041-0
	White	451240-7
	Blue	451243-1
	Red	416225-0
	Black	456586-6
Crevice nozzle 415 set	White	199439-3

28-M Round brush 28

Nozzle assembly Seat nozzle 28



Seat nozzle 28

For car seat

Color	Part No.
lvory	198548-5
White	198877-6
Blue	198549-3
Red	198550-8
Black	198551-6



White

Blue

Black

199037-3

199040-4

198921-9

Shelf brush set28
(For gentle cleaning by soft-tipped brush)



Color	Part No.
Ivory	191724-0
White	198872-6
Blue	198534-6
Red	198535-4
Black	198536-2

28-N Corner nozzle 300-28



	Description	Color	Part No.
	300-28mm	White	198918-8
		Blue	198989-5
		Black	198991-8

28-Q Flexible rubber nozzle





Cordless Cleaner for Capsule type

For Model: CL183D, DCL181F, DCL180, CL111D, CL106FD, CL070D

Filter



Other Cleaners For DVC260 / DVC261

Hose band



Pre filter



Filter bag set 10pcs / set



Easy shake off dust filter



Filter set assembly HEPA filter



Dust bag assembly



Description	Part No.
Hose band	166116-2
Filter bag set 10pcs / set	197902-0
Filter set assembly - HEPA filter	123636-9
Dust bag assembly	197898-5

Description	Per pkg.	Part No.
Filter	1	443060-3
Pre filter	1	451208-3
Easy shake off dust filter	1	455176-2

For DVC750L

Filter Complete, Pre Filter and Damper

*(Dry use only)

*Pre filter



*Damper



*Pre filter and Damper set





Filter complete (HEPA filter) (Standard equipment)



Shoulder Belt Set



Item	Part No.
Pre filter	162635-6
Damper	422449-8
Pre filter and Damper set	199827-4
Filter complete (HEPA filter)	162518-0
Shoulder Belt Set	162523-7

Cordless Cleaner for Paper bag type

For Model:

DCL182, CL107FD, CL105D, CL104D, CL072D, CL121D

Paper filter

Dust bag





Easy shake off dust bag

Description	Per pkg.	Part No.
Paper filter	10	194565-3
Anti-bacterial type	5	194566-1
Dust bag	1	166043-3
Anti-bacterial type	1	166084-9
Easy shake off dust bag	1	198748-7

Other Cleaners For DVC660 / DVC665

Hose band



Filter set assembly



Dust bag assembly



Filter bag set 10pcs/set



Description	Part No.
Hose band	166116-2
Filter set assembly - HEPA Filter	191D12-9
Dust bag assembly	191C30-1
Filter bag set	191C26-2
•	

For DRC200

Boundary line tape (15m roll)



Side brushes



Power brush



Turn brush cover



Filter



Model No.	Part No.
Boundary line tape (15m roll)	SH00000231(EU)
Side brushes	SH00000065
Power brush	SH00000063
Turn brush cover	SH00000064
Filter	SH00000213

For DVC350

Dust bag





Nozzle assembly

A:Standard equipment



Model No.	Size(mm)	Туре	Part No.
DVC350	220	Α	132025-7
	430	-	134182-7

ACCESSORIES (CLEANING EQUIPMENT)

For DCL501







	Туре	Part No.
Hose	-	SH00000034
Straight pipe	Adjustable leugth	SH00000060
Nozzle assembly	Flooring & carpet	SH00000058
Crevice nozzle	-	SH00000042

For CL121D

















S/N	Description	Part No.
1	Mat nozzle 120	459056-4
2	Seat nozzle 120	140H95-0
3	Rubber nozzle 330	422437-5
4	Soft brush 360	140H94-2
5	Blower attachment	140J64-3
6	Shoulder belt	162544-9
7	Valve stay compleate	143677-9
8	Tool bag	199900-0

Front cuffs & Joint

Front cuffs 22



Front cuffs 24



Front cuffs 38



Joint 22-38



Joint 38



Joint H



Rubber sleeve 18-21



Туре	Part No.
Front cuffs 22	195547-8
Front cuffs 24	195546-0
Front cuffs 38	195545-2
Joint 22-38	195548-6
Joint 38	418500-0
Joint H	424009-2
Rubber sleeve 18-21	192202-3

Hose connection 28mm

28-A

Hose

Note:

Can be connected with power tools, Front cuffs and Joint are required for some power tools.
*DVC260, DVC261, DVC265 only
* for cleaning (Use with Bending pipe assembly)

Size	Length (m)	with Front cuffs	Part No.
28mm	1.0	-	*143787-2
28mm	1.5	38	*152992-0
28mm	1.5	22, 38	A-34235
28mm	2.5	22, 24, 38	195437-5
28mm	3.5	22, 24, 38	195433-3

Hose connection 32mm

32-A

Hose 32mm

for cleaning Use with 28-B Bending pipe assembly



Size	Length (m)	with Front cuffs	Part No.
32mm	1.0	Sleeve	199453-9
32mm	1.7	Sleeve	199493-7

Bending pipe *with Hose 28 sleeve





Description	Part No.
For Aluminum (Part No. 140C10 a) Talesconic vin a accombly with lady	140G26-3
For Aluminum (Part No. 140G19-0) Telescopic pipe assembly with lock	*127093-3
For plactic stypicht pine 30 and Talescopic pine assembly 30	458184-2
For plastic straight pipe 28 and Telescopic pipe assembly 28	*126756-8
with 38mm hose	123677-5

Straight pipe



Description	Part No.
Aluminum Telescopic pipe assembly Pipe length is variably adjustable from 590 to 942mm.	140G19-0
Telescopic pipe assembly 28 Pipe length is variably adjustable from 500 to 850mm.	123584-2

28-D

Nozzle assembly

Flat type





F/C switching t-nozzle 28 Flooring & carpet

Floor/carpet t-nozzle For rug / carpet cleaning





For rug / carpet cleaning





Floor t-nozzle 28





Description	Color	Part No.
Flat type	Black	199454-7
F/C switching t-nozzle 28 Flooring & carpet	White	A-61335 198183-9
Floor/carpet t-nozzle	White	198525-7
For rug / carpet cleaning	Black	198526-5
For rug / carpet cleaning	lvory	122291-4
Floor t-nozzle 28	White	123486-2
Seat nozzle 28 For car seat	White	199037-3
	Black	198921-9

28-E Round Brush



Colour	Part No.
White	198877-6
Black	198551-6

Holder set 10-33







28-F **Corner nozzle**

Туре	Color	Part No.
300-28mm	White	198918-8
	Black	198991-8
Crevice nozzle 415 set	White	199439-3

Holder cuff set

195544-4



Components	Part No.
Holder 10-33, Front cuff 24, Front cuff 22	195637-7

28-G Shelf Brush (For gentle cleaning by soft-tipped brush)



Colour	Part No.
White	198872-6
Black	198536-2

28-H Flexible Rubber Nozzle



Colour	Part No.
White	197900-4

28-I

Tapered nozzle set

Use with Front cutts 22 or Flexible rubber nozzle



Colour	Part No.
Gray	192236-6

Hose connection 38mm

38-A

Hose 38mm

for cleaning *Use with 28-B Bending pipe assembly



Size	Length (m)	with Front cuffs	Part No.
38mm	1.5	-	*199388-4
38mm	1.5	38	198757-6
38mm	2.5	38	195434-1

Cleaning set Includes one each:

- -Hose complete 38-2.5
- -Straight pipe -Bending pipe -Nozzle assembly
- -Corner nozzle

195439-1	
Part No.	



38-B **Bending Pipe**



Description	Part No.
Aluminum	192562-3





Description	Part No.
Aluminum	192563-1

38-D

Nozzle assembly

Flat type



Flooring & carpet



Universal Type

Compact Type A



Compact Type B (wet model only)

Wide Type (wet model only)

Description	Dry/ Wet	Part No.
Flat type	Dry	199455-5
Flooring & carpet	Dry	198184-7
Universal Type	Dry/ Wet	195551-7
Compact Type A	Dry	195549-4
Compact Type B	Wet	195550-9
Wide Type	Wet	A-47846

Round Brush





Description	Dry/Wet	Part No.
38mm	Black	191657-9

38-F Corner nozzle



Туре	Color	Part No.
38mm	Yellow gray	410306-2



Makita



Outdoor Power Equipment

Battery Powered Wheelbarrow DCU180

Moving cart powered by one or two LXT Li-ion batteries

Two variations: Carrier type and Bucket type

Carrier type

Size width is adjustable. If you remove Side pipes, big size materials can be loaded.



can load sand, gravel, powder etc.













Brake lever with locking mechanism prevents the accidental start on a slope.



Able to run with even one battery thanks to parallel battery connection.



Detachable Rear wheel



After removing rear wheels and installing Foot (left/ right), the cart can be used as an unicycle.



High operating efficiency

Outer Rotor BL Motor provides high operating efficiency



Extreme Protection Technology

LED lights



 illuminate front area Battery case section is equipped with On-off switch

Foldable handle



can save the storage space.

DCU180Z Cordless Wheel Barrow

Moving cart powered by one or two LXT Li-ion batteries

Li-ion Ah 6.0 5.0 3.0 1.5



Max Run Time (min) Max Load Capacity Traveling Speed

Max Climbing Capacity (LxWxH)

Net Weight

with BL1860B: 120 130 kg (290 lbs.) Forward, High / Low: 0 - 3.5 / 0 - 1.5 km/h Reverse: 0 - 1 km/h

12° When carrier is installed /During operation: 1.315x1.060x900 mm

(51-3/4"x41-3/4"x35-1/2") 39.3 - 44.8 kg (86.5 - 98.7 lbs)







Lock Key, Support Legs, Wrenches Z: Battery and Charger are sold separately

OUTDOOR POWER EQUIPMENT



DLM532Z Cordless Lawn Mower

New

LXT BL Brushless Cordless 53 cm (21") Self-Propelled Lawn Mower



(13/16" - 3-15/16") Grass box capacity 60 L No Load Speed (RPM) Propelling speed Continuous Use (min.)

Blade Hole Diameter

Cutting Width
Cutting Height

Net Weight

2,300 - 2,800 2.5 - 5.0 km/h w/BL1860B, self-propelled: 40 w/BL1860B, push-drive: 54 1,600 W 1,630-1,715x590x

10.0 mm (3/8")

20 - 100 mm

Max Output Dimensions (L x W x H)

990-1,095 mm (64"-67-1/2"x23-1/4"x39"-43") 39.0-42.8 kg (86.0-94.4 lbs.)

 $Blade, Mulch\ plug, Side\ Discharge\ Mouth, Socket\ Wrench,\ Rod,\ Battery,\ Charger$



DLM530Z Cordless Lawn Mower

BL Brushless Cordless 53 cm (21") Lawn Mower



Blade Hole Diameter Cutting Width Cutting Height

Grass box capacity No Load Speed (RPM) Continuous Use (min.) Max Output Dimensions (L x W x H)

Net Weight

10.0 mm (3/8") 534 mm (21") 20 - 100 mm

(13/16" - 3-15/16") 2,300 - 2,800 w/BL1860B, push-drive: 54 1,600 W 1,630-1,715x590x990-

1,095 mm (64"-67-1/2"x23-1/4"x39"-43") (78.3 - 86.6 lbs.)

Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger

DLM462Z Cordless Lawn Mower

LXT BL Brushless Cordless 46 cm (18") Self-Propelled Lawn Mower



Cutting Width Cutting Height Grass box capacity No Load Speed (RPM) Propelling speed Continuous Use (min.)

Net weight

(13/16" - 3-15/16") 60 L 2,500 - 3,300 w/BL1860B, self-propelled: 40 w/BL1860B, push-drive: 51 Max Output Dimensions (L x W x H) 1.600 W 1,610-1,690x535x980-1,095 mm (63-1/2'-66-1/2'\x21"\x38-1/2'-43")

35.3 - 39.0 kg (77.8 - 86.0 lbs.)

10.0 mm (3/8")

460 mm (18") 20 - 100 mm

Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger

Cordless Lawn Mower DLM460



Dual battery fuel gauge 2-speed mode

Main switch

Cutting / Collecting / Mulching

Single-lever cutting height adjustment



IPX4 (water resistant)



Child lock key



OUTDOOR POWER EQUIPMENT

DLM460Z 460mm (18") Cordless Lawn Mower

Brushless Cordless 46 cm (18") 3-in-1 Mower



SOFT BUT NO LOAD

18V 2 S 1

Blade Type Hole Diameter Cutting Width Cutting Height No Load Speed (RPM) Recommended mowing area Continuous Use (min.)

Sound Power Level Dimensions (L x W x H)

2 lootn 10.0 mm (3/8") 460 mm (18") 20-75mm (13/16"-2-5/16") 2,500 - 3,300 w/ BL1860B x2: 800 - 1,600 m² w/ BL1860B / BL1850B / BL1840B/BL1830B/BL1820B/ BL1815N:21/18/14/10/8/6 91 dB(A) 91 dB(A) 1,319-1,518x532x 879-1,138 mm (52"-59-3/4"x21" x34-1/2"-44-3/4") 25.3-27.6 kg (55.8-60.8 lbs.)

2 Tooth

Net Weight

Blade, Socket Wrench, Battery, Fast Charger Z: Battery and Charger are sold separately

DLM432Z 430mm (17") Cordless Lawn Mower

LXT Li-lon Cordless 38 cm (15") / 43 cm (17") 2-in-1 Mower



Cutting Width 430 mm (17") 20 - 75 mm (13/16" - 2-15/16") No Load Speed (RPM) 3.600 3,600 1,435-1,490x460x 1,005-1,045 mm (56-1/2"-58-3/4"x18-1/8"x39-1/2"-41-1/4") Dimensions (L x W x H) Net Weight 16.8 - 17.5 kg (36.6 - 38.6 lbs.)

Blade, Wrench, Battery, Charger

DLM431PM2 / Z 430mm (17") Cordless Lawn Mower

Cordless Lawn Mower with better usability



Blade Type Cutting Width Cutting Wath
Cutting Height
Grass box capacity
No Load Speed (RPM)
Recommended
mowing area
Max Output (W) Continuous Use (min.) Wheel Size

Sound Power Level Dimensions (L x W x H) Net Weight

20-75mm(13/16-2-15/16") 50L 3,600 With BL 1850B x 2: 475 - 950 m² 730 With BI 1850B x 2:30 Front / Rear: 140 / 160 mm (5-1/2" / 6-5/16") 93 dB(A) 93 aB(A) 1,450-1,490x460x 950-1,020mm (57-58-3/4"x18-1/8" x37-1/2-40-1/4") 17.8 kg (39.3 lbs)

2 Tooth, Rotary Type

430 mm (17")

Socket wrench, Battery, Fast Charger Z: Battery and Charger are sold separately

DLM382Z 380mm (15") Cordless Lawn Mower

380 mm (15") 20 - 75 mm

(13/16" - 2-15/16")

3,700 1,380-1,410x450x

LXT Li-lon Cordless 38 cm (15") / 43 cm (17") 2-in-1 Mower



No Load Speed (RPM) Dimensions (L x W x H) 985-1,005 mm (54-1/4"-55-1/2"x17-3/4"x38-3/4"-39-1/2") Net Weight 16.2 - 16.9 kg (35.7 - 37.3 lbs.)

Cutting Width Cutting Height

190v **+ 1**90v **>** 36V **XPT**

Blade, Wrench, Battery, Charger

DLM380RF2 380mm (15") Cordless Lawn Mower

Cordless 2 in 1 Mowers



Blade Type Cutting Width 2 Tooth, Rotary Type 380 mm (15") 25 - 75 mm (1 - 2-15/16") Cutting Height Grass box capacity 40L Max Output (W) No Load Speed (RPM) Recommended mowina area Continuous Use (min.) Wheel Size Sound Power Level Dimensions

620 3,700 With BL1830B x 2: 270 - 540 m² With BL1830B x 2: 17 Front/Rear: 140/190 mm (5-1/2" / 7-1/2") 93 dB(A) 1 145x465x1.023-1,070mm (45"x18-1/4"x40-1/4"-42") Net Weight 14.5 kg (32.0 lbs)

ELM 4620 460mm (18-1/8") Electric Lawn Mower

1,800N 4-in-1 Electric Mower



Continuous Rating Input 1,800W Cutting Width 460 mm (18-1/8") Cutting Height 20-75mm(13/16"-2-15/16") No Load Speed (RPM) 2,950 Recommended Mowing 800 m² Area Up To

Fast Charger, Battery Cartridge, Wrench, Blade

ELM3720 370mm (14-1/2") Electric Lawn Mower

Stavs upright for easy maintenance and cleaning



Continuous Rating Input 1,600W Cutting Width 410 mm (16-1/8") 20-75mm(13/16"-2-15/16") Cutting Height No Load Speed (RPM) Recommended Mowing 600 m Area Up To



Continuous Rating Input 1,400W Cutting Width Cutting Height 370 mm (14-1/2") 20-55 mm (13/16"-2-3/16") No Load Speed (RPM) Recommended Mowing 500 m² Area Up To

OUTDOOR POWER EQUIPMENT

ELM3320 330 mm (13") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Blade, Wrench

Continuous Rating Input 1,200W Cutting Width Cutting Height 330 mm (13") 20-55mm(13/16"-2-3/16") No Load Speed (RPM)
Recommended Mowing 400 m²

Area Up To

PLM4620N2 460mm (18-1/8") Petrol Lawn Mower

More maneuverable petrol lawn mower



Engine Cutting Width Cutting Height B&S625E R/S, 150mL 460mm (18-1/8") 25, 31, 43, 56, 70mm (1, 1-1/4, 1-11/16, 2-3/16, 2-3/4")

Propelling Speed Recommended Mowing Area Up To

Grass Box Capacity 810x560x440mm Dimensions (31-8/9"x22"x17-1/3") 27.6 kg (60.9 lbs.) (L x W x H) Net Weight

Mulch Plug



DUB363PG2ZV / ZV Cordless Blower

LXT BL Brushless Cordless Variable Speed Blower



Li-ion Ab 6.0 5.0 3.0 1.5

Max Air Volume 13.4 m³/min (473 CFM) Max Air Velocity
No Load Speed (RPM) 65 m/s 0 - 7,850 Blowing Force Max Output 14.4 N 860 W w/ 3-Stage Telescopic Long Nozzle: 737/786/836x193x415 mm Dimensions (L x W x H) 75//760/630X193X4151 (7-7/16"/31"/33"x7-5/8"x16-3/8") w/ Vacuum Nozzle: 1.396x604x415 mm

(55"x23-3/4"x16-3/8") Net weiaht 4.5 - 6.6 kg (9.9 - 14.6 lbs.)

Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench, Battery, Charger

Cordless Blower DUB363

2 in 1 Blower & Vacuum cleaner





Motor interlock system

The motor does not start up until the nozzle and fan cover have been properly installed.

Variable speed control by trigger, with Cruise control lever for lock-on operation

Dust bag capacity

3-stage telescopic long



For Blower

Max air volume $3.4_{\text{m}^3/\text{min}}$ Max air velocity 65_{m/s}

For Vacuum cleaner

Max air volume $12.7_{\text{m}^3/\text{min}}$ Max sealed suction







Mulching function






Shredding blade

Cordless Blower DUB362



Longer runtime compared to the competitors. (based on the same air volume and velocity)



DUB362PG2 / PT2 / Z Cordless Blower

Brushless Cordless Variable 6-Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5

Capacity (Ah) Energy Capacity (Wh) Max Air Volume Max Air Velocity No Load Speed (RPM) Sound Power Level Dimensions (L x W x H) Net Weight

OUTDOOR POWER EQUIPMENT

5.0/6.0 90x2/108x2 90x2 / 108x2 13.4 m³/min (473 CFM) 54 m/s (120 MPH) 11,400 - 21,500 93.5 dB(A) 830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8" x8-1/8"x11-5/8") 3.5 kg (7.7 lbs)







Fast charger, Battery cartridge, Nozzle, Shoulder belt Z: Battery and Charger are sold separately







Shoulder Belt, Nozzle, Battery, Charger, Hex Wrench

DUB182Z Cordless Blower

High/ Medium/ Low air volume settings

Li-ion Ah 6.0 5.0 3.0 1.5



Air volume	2.6 m³/min
Air speed	80 m/s
Air Pressure	5.4 kPa (550 mmH2O)
No Load Speed (RPM)	0-18,000
Sound Power Level	95 dB(A)
Dimensions	525x155x212 mm
(LxWxH)	(20-3/4"x6-1/8"x8-3/8")
Net Weight	1.7 kg (3.7 lbs)





Nozzle Assembly, Z: Battery and Charger are sold separately

UB1103 Blower

High output air volume





Continuous Rating Input 600W 0-4 1 m³/min Air Volume Air Pressure 0-5.7 kPa (0-580 mmH,O) 0-16,000 No Load Speed (RPM) Dimensions 479x185x178mm (18-7/8"x7-1/4"x7") Net Weiaht 2.0kg (4.3bs) Power Supply Cord 2.5m (8.2ft)

UB1102 Blower High output air volume





Continuous Rating Input 600W Air Volume Air Pressure 4.1 m³/min 5.7 kPa No Load Speed (RPM) 16.000 479x185x178 mm Dimensions (18-7/8"x7-1/4"x7") 1.9 - 2.2 kg (4.3 - 4.8 lbs.) (LxWxH) Net Weight Power Supply Cord 2.5 m (8.2 ft.)





Nozzle Assembly Front Cuffs 24, Poly Bag Set





Nozzle Assembly Front Cuffs 24, Poly Bag Set

PM7650H 75.6mL- 4 stroke Mist Blower

L-shaped chemical tank lowers center of gravity for improved balance



Displacement Fuel Tank Capacity Max Air Volume 14.1 m³/min (497 CFM) The Velocity of The Wind 85m/s (without blower pipes) Sound Power Level 110.7 dB(A) 3.5 m/s² 420x440x595mm Vibration Level Dimensions (LxWxH) (16-1/2"x17-1/4"x23-1/2") 13.9kg (30.6lbs) Net Weight

Net weight without fuel with blower Overall length: Without blower pipes



Fast Charger, Battery Cartridge, Guide Bar Cover, Oil Supply, File

EB7660TH 75.6mL - 4 stroke Petrol Blower

Powerful yet easy-to-handle back pack blower



Displacement Power Rating 75.6 mL 3.0 kW (4.1 PS) 20 m³/min (706 CFM) 92 m/s (205 MPH) Max Air Volume Max Air Velocity Fuel Tank Capacity 1.9 L (64 oz.) 2,800 - 7,200 No Load Speed (RPM) 4.7 Nm 110.7 dB(A) Max Torque Sound Power Level Dimensions (L x W x H) 332x460x480mm (13-1/8"x18-1/8"x18-7/8") 11.9 - 12.1 kg (26.2 - 26.7 lbs) Net Weight







Net weight: without fuel with blower pipe Overall length: Without blower pipes

Oil bottle set, Box wrench, Driver, Hand grip (EB7660WH only), Flexible pipe, Swivel pipe, Hose clamp, Waist belt, End nozzle, Flat nozzle, Short pipe, Long pipe, Accessory bag

EB5300TH 52.5mL - 4 Petrol Blower

52.5 mL 4-stroke Tube-mounted throttle, backpack blower



Displacement 52.5 mL Power Rating 1.8 kW (2.5 PS) 15 m³/min (516 CFM) Max Air Volume Max Air Velocity 98 m/s (220 MPH) Fuel Tank Capacity 1.8 L (61 oz.) No Load Speed (RPM) 2,800 - 6,400 320x450x475 mm Dimensions (LxWxH)(12-5/8"x17-3/4"x18-3/4") Net Weight 9.8 - 10.1 ka

Net weight: without fuel with blower pipe, Overall length: Without blower pipes

Oil bottle set, Socket Wrench, Driver, Flexible Pipe, Swivel Pipe, Hose Clamp, End nozzle x2, Flat Nozzle, Long Pipe,

BHX2500 24.5mL - 4 stroke Petrol Blower

Designed for continuous use and superior results



Displacement 24.5 mL Power Rating 10.1 m³/min (356 CFM) Max Air Volume 65 m/s (145 MPH) 0.52 L (17.6 oz.) Max Air Velocity Fuel Tank Capacity Sound Power Level 102 dB(A) 5.2 m/s² Vibration Level 3,500 - 7,800 350x231x368mm No Load Speed (RPM) Dimensions (LxWxH) (13.8"x9.1"x14.5") Net Weight 4.5 kg (9.8 lbs)

Net weight: without fuel with blower pipes Overall length: Without blower pipes



Pipe, Blower Tube, Blower Nozzle, Socket Wrench,





Cordless Chain Saw DUC353 / DUC355

Excellent cutting performance equivalent to 30mL class engine chain saws

High operating efficiency


Outer Rotor Brushless Motor direct-drive system provides high operating efficiency.

High operability


Chain brake and Variable speed trigger switch provide high operability equivalent to engine



Work efficiency



Work amount







Powered by two 18V Li-ion batteries in series



DUC353ZB / Z Cordless Chain Saw DUC355Z Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws



Li-ion Ah 6.0 5.0 3.0 1.5

Guide Bar Length 350 mm (14") Chain Pitch / 1.1/1.3 mm (.043"/.050") Chain Gauge Chain Speed Chain Oil Tank Volume 0-20 m/s (0-1,200 m/min) 200 mL Sound Power Level 98.7 dB(A) 762x211x235mm Dimensions (30"x8-5/16"x9-1/4") 4.7 kg - 5.4kg (10.4 lbs - 11.8lbs) (LxWxH) Net Weiaht







Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Wrench Z: Battery and Charger are sold separately

0

 \leq

Qo

COMPACT

W 0

DUC306ZB Cordless Chain Saw

New

18V X2 (36V) LXT BL Brushless Cordless 30 cm (12") Chain Saw



100 H 100 \$ 36V **BL** XPT 18V M S 1

300 mm (12") 294 mm (11-5/8") 3/8" Guide Bar Lenath Cutting Length Chain Pitch 1.3 mm (0.05") 0 - 20 m/s (0 - 1,200 m/ min) (0 - 3,940 FPM) Chain Gauae Chain Speed

Chain Oil Tank Volume 200 mL (6.8 US oz) Max Output
Dimensions (L x W x H) 1,200 W 270-651x205x232 mm (10-5/8"-25-5/8"x8-1/8"x9-1/8") 4.6 - 5.1 k (10.1 - 11.1 lbs.)

Net Weight



DUC302Z Cordless Chain Saw

Li-ion Ah 6.0 5.0 3.0 1.5

Guide Bar Length 300 mm (12") 9.5 mm (3/8") 1.1 mm (0.043") Chain Gauae 8.3 m/s (500 m/min) (1.650 FPM)

Chain Oil Tank Volum 85 mL (2.9 US oz) Sound Power Level 95.4 dB(A) Dimensions 600x234x198mm (23-5/8"x9-1/4"x7-3/4") (LxWxH)4.1 kg (9.0 lbs)



Cordless chain saws powered by two 18V Li-ion batteries in series

Guide Bar Cover, Oil Supply, File, Z: Battery and Charger are sold separately Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper, Battery, Charger, Z: Battery and Charger are sold separately

DUC254Z 250 mm (10") Cordless Chain Saw

Efficiency equivalent to 23mL class engine chain saw



18V M S

Guide Bar Length Chain Pitch Chain Gauge Chain Speed

min) (0-4,720 FPM) Chain Oil Tank Volume 140 mL Sound Power Level 103.2 dB(A) Dimensions w/o Guide Bar 258x184x191 mm (LxWxH) (10-1/8"x7-1/4"x7-1/2") w/25 cm (10") 90PX

Sprocket Nose Bar: (19"x7-1/4"x7-1/2") Net Weight 2.8-3.2 kg (6.2-6.9 lbs.)

250 mm (10")

3/8" / 1.1 mm (0.043")

3/8" / 1.3 mm (0.050")

0-24 m/s (0-1.440 m/

153 MW

132 💹

Saw Chain, Guide Bar, Guide Bar Cover, Wrench, Accessory Bag Z: Battery and Charger are sold separately

DUC122Z 115mm (4-1/2") Cordless Chain Saw

High cutting speed with powerful motor



Guide Bar Length 115 mm (4-1/2") Chain Pitch 6 35 mm (1/4") Chain Gauge 1.3 mm (0.05") Chain Speed 5.0 m/s (300 m/min) (980 FPM) Chain Oil Tank Volum 80 mL (2.7 US oz) 92.7 dB(A) 422x195x215mm Sound Power Level Dimensions (16-5/8"x7-5/8"x8-1/2") (LxWxH)Net Weight 2.6 kg (5.7 lbs)



Fast Charger, Battery Cartridge, Guide Bar Cover, Oil Supply, File Z; Battery and Charger are sold separately

UC4551A 450 mm (18") Electric Chain Saw

Heavy-duty for fast and efficient cutting



Continuous Rating Input 2,000W Chain Speed Per Minute 870 m (2,900 ft) Guide Bar Length 450 mm (18") Saw Chain Pitch: 3/8" Gauge: 1.3 mm (0.050") 101.8 dB(A) Sound Power Level Dimensions (L x W x H) 505x200x220 mm (19-7/8"x7-7/8"x8-5/8") Net Weight 5.7 kg (12.4 lbs.)

0.3 m (0.98 ft)

400 mm (16")

101.3 dB(A)

/ 1.3 mm (0.050")

455x245x200 mm

Pitch: 3/8" Gauge: 1.1 mm (0.043")

(17-7/8"x9-5/8"x7-7/8")

4.8 - 4.9 kg (10.5 - 10.7 lbs.)

Dimensions: excluding blade and guide bar

Continuous Ratina Input 1.800W

Guide Bar Length

Sound Power Level

Saw Chain

Dimensions

(LxWxH)

Chain Speed Per Minute 870 m (2,900 ft)

Power Supply Cord

UC4051A 400 mm (16") Chain Saw

Heavy-duty for fast and efficient cutting



Continuous Rating Input 2,000W Chain Speed Per Minute 870 m (2,900 ft) Guide Bar Length 400 mm (16") Pitch: 3/8" Gauge: 1.3 mm (0.050") 101.8 dB(A) Saw Chain Sound Power Level Dimensions (L x W x H) 505x200x220 mm (19-7/8"x7-7/8"x8-5/8") Net weiaht 5.6 kg (12.3 lbs.) Power Supply Cord 0.3 m (0.98 ft)

Saw Chain, Guide Bar Cover, Hook complete

UC4041A 400 mm (16") Electric Chain Saw

UC3551A 350mm (14") Chain Saw

Saw Chain, Guide Bar Cover, Hook complete

New adjustment lever for easier tool-less tension adjustment of saw chain and new oil pump



Continuous Ratina Input 2.000W Chain Speed Per Minute 870m (2,900ft) Guide Bar Lenath 350mm (14") Saw Chain Pitch 1.3mm (.050") Saw Chain Gauge Sound Power Level 101.8dB(A) 505x200x220mm Dimensions (LxWxH) (19-7/8"x7-7/8"x8-5/8") Net Weiaht 5.5ka (12.1lbs) Power Supply Cord

Dimensions: excluding blade and guide bar



Adjustment lever for easier tool-less tension adjustment of saw chain and new oil pump

Saw Chain, Guide Bar Cover, Hook complete



Chain Blade, Guide Bar Cover, Hook Complete



UC3541A 350mm (14") Chain Saw

Excellent in heavy duty application



Continuous Rating Input 1,800W Chain Speed Per Minute 870m (2,900ft) 3/8" / 1.1mm (.043") Saw Chain Pitch Saw Chain Gauge 1.3mm (.050") Sound Power Level 101.3dB(A) 455x245x200mm (17-7/8"x9-5/8"x7-7/8") (LxWxH)Net Weight 4.7kg (10.3lbs)

132 WW

Dimensions: excluding blade and guide bar

DCS9010-76 760mm (30") Petrol Chain Saw

New heavy timber saw for the hardest working for professionals

EA6100P60E 300mm - 600mm (15" - 24") Petrol Chain Saw



Guide Bar Lenath 760mm (30") Saw Chain Pitch Saw Chain Gauge 1.5 mm (.058") Displacement 4.9 kW/6.7 PS **Enaine Power** Fuel Tank Capacity Chain Oil Tank Volume 0.4 L Power Head Weight 8.2 kg (18.1 lbs.)

Dimensions: excluding blade and guide bar



Chain Blade, Guide Bar Cover, Hook Complete



Chain Blade, Guide Bar Cover, Wrench, Screwdriver

EA7900P70E 700mm (28") Petrol Chain Saw

For professional chain saw with ergonomic designed body



700mm (28") Guide Bar Length Saw Chain Pitch Saw Chain Gauge 1.5 mm (.058") Displacement Engine Power 79 ml 4.3 kW/5.8 PS Fuel Tank Capacity Chain Oil Tank Volume 0.751 0.42 L Power Head Weight 6.3 kg (13.8 lbs.)

Dimensions: excluding blade and guide bar



Scavenging Losses Rejection

Guide Bar, Saw Chain, Guide Bar Cover, Socket Wrench, Screwdriver

Stratified scavenging system complying with many exhaust emission regulations 600mm (24") Guide Bar Length Saw Chain Pitch 0 325 or 3/8 Saw Chain Gauge 1.5mm (.058") Displacement 60.7ml Engine Power 3.4kW/4.6PS Fuel Tank Capacity Chain Oil Tank Volume 0.81 0.48L Sound Power Level 117dR(A) Dimensions 435x243x312mm $(L \times W \times H)$ (17-1/8"x9-9/16"x12-1/4") 6.0kg (13.2lbs) Power Head Weight

Dimensions: excluding blade and guide bar





EA4301F45B / FX1 450mm (18") Petrol Chain Saw



Chain blade, Guide bar cover, Wrenches

EA3201S35B / S40B 350, 400mm (14",16") Petrol Chain Saw

Entry class chain saw equipped with 32cc 2-stroke engine



Dimensions: excluding blade and guide bar









Chain Blade, Guide Bar Cover, Wrenches

Guide Bar Length 35B: 350mm (14") 40B: 400mm (16") Chain Blade Pitch 3/8' Chain Blade Gauge 1.1mm (.043")/1.3mm (.050") Displacement Engine Power 32ml 1.35kW / 1.9PS Fuel Tank Chain Oil Tank 0.4L 0.28L Sound Power Level 109 8dB(A) Dimensions 405x250x273mm (16"x9-7/8"x10-3/4") 4.2kg (9.3lbs) $(L \times W \times H)$ Power Head Weight

1

Guide Bar, Chain Blade, Guide Bar Cover, Steel Spike Bumper, Socket Wrench, Screwdriver

EA3110T-30 300mm (12") Petrol Chain Saw

Compact and lightweight body for better handling



Standard Guide Bar 300mm (12") Saw Chain Pitch Saw Chain Gauge 1.3mm (.050") 1.0kW / 1.4PS **Engine Power** Fuel Tank Capacity Chain Oil Tank Volume 0.18L 259x236x217mm $(L \times W \times H)$ (10-1/4"x9-1/4"x8-1/2") Power Head Weight 3.2kg (7.0lbs.)

Dimensions: excluding blade and guide bar



Guide Bar, Chain Blade, Guide Bar Cover, Socket Wrench, + Screwdriver, - Screwdriver

DCS231T 250mm (10") Petrol Chain Saw

Weighs Only 2.5kg (5.5lbs) & Easy Start System



Standard Guide Bar 250mm (10") Chain Blade Pitch 0.050" Chain Blade Gauge 22.2cm³ 0.74kw/1.02PS Displacement Power Rating Fuel Tank Chain Oil Tank 0.19L 2.5kg (5.5lbs) Power Head Weight

Dimensions: excluding blade and guide bar





Chain Blade 250mm (25AP-60E for carving bar or 91VG-40E for sprocket nose bar), Guide Bar (Carving bar or Sprocket nose bar), Guide Bar Cover, Wrench 13-16





Blade Cover Z: Battery and Charger are sold separately

DUH754SZ Cordless Hedge Trimmer

18V LXT BL Brushless Cordless Hedge Trimmer



Li-ion Ah 6.0 5.0 3.0 1.5

Blade Length Max Cutting Capacity Strokes Per Minute (SPM)

Net weiaht

High: 0 - 4,400 Med: 0 - 3,600 Low: 0 - 2,000 Dimensions (LxWxH) 1.198x280x147 mm 4.1 kg (9.0 lbs.)

750 mm (29-1/2")

23.5 mm (15/16")

18V MAN SEE XPT

Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger

DUH601Z Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer



Tooth Spacing Max Cutting Capacity Strokes Per Minute (SPM) 600 mm (23-5/8") 35 mm (1-3/8") 23.5 mm (15/16") High: 0 - 4,400 Med: 0 - 3,600 Low: 0 - 2,000 High: 55 Med: 80

Continuous Use (min.) Low: 200

Max Output 520 W 1,121x225x192 mm (44-1/4"x8-7/8"x7-1/2") Dimensions (LxWxH) 3.8 - 4.5 kg (8.4 - 9.8 lbs.)

BL XPT 18V MAC) 3 X S MA

de Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are

DUH751Z Cordless Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer



Blade Length 750 mm (29-1/2") Tooth Spacing Max Cutting Capacity 35 mm (1-3/8") 23.5 mm (15/16") Strokes Per Minute (SPM) High: 0 - 4,400 Med: 0 - 3,600 Low: 0 - 2,000 Continuous Use (min.) High: 70 Med: 45

Low: 160 Max Output 520 W Dimensions (LxWxH)

1,261x225x192 mm (49-5/8"x8-7/8"x7-1/2") 3.8 - 4.5 kg (8.4 - 9.8 lbs.) Net Weight

BL XPT 18V MAC 3 3 8 6

Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

DUH523RF / SF / Z 520mm (20-1/2") Cordless Hedge Trimmer

User-replaceable blade





Blade length Strokes Per Minute (SPM) 520mm (20-1/2") 2,700 Tooth spacing 26mm (1") Sound Power Level 84.3 dB(A) 938x195x193mm Dimensions (LxWxH) (37"x7-5/8"x7-5/8") Max Output Net Weight 210W 3 - 3.4kg (6.7 - 7.5lbs)





Fast Charger, Battery Cartridge, Blade Cover Z: Battery and Charger are sold separately

DUH502Z Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 50 cm (19-5/8") Hedge Trimmer



Blade Lenath Tooth Spacing Max Cuttina Capacity Strokes Per Minute (SPM)

500 mm (19-5/8") 35 mm (1-3/8") 21.5 mm (7/8") Med: 0 - 3,600 Low: 0 - 2,000 Hiah: 50 Med: 75

Low: 230

Max Output Dimensions (LxWxH)

Continuous Use (min.)

520 W 1,016x225x192 mm (40"x8-7/8"x7-1/2") 3.8 - 4.5 kg (8.4 - 9.8 lbs.)



Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately



Net Weight

UH353DSA / DZ 350mm (13-3/4") Cordless Hedge Trimmer

Lightweight, Low Vibration, Low Noise



Max Output Power Cycles Per Mintue (cpm) 170W Strokes Per Minute (SPM) 3,300 Cutting width 350 mm (13-3/4") Max Cuttina Capacity 15mm (9/16) 693 x 175 x 165mm (27-1/4 x 6-7/8 x 6-1/2) (LxWxH)Net Weight 2 - 2.1 kg (4.3 - 4.7 lbs.)

UH201DSAX / DZ 200mm (7-7/8") Cordless Hedge Trimmer 12V max CXT Li-lon Cordless 20 cm (7-7/8") Hedge Trimmer

Li-ion Ah 4.0 2.0 1.5



Blade Length 200 mm (7-7/8") 504 x 120 x 131mm Dimensions (LxWxH) Net Weight 1.3 - 1.5 kg (2.8 - 3.3 lbs)





Base Frame, Blade Cover, Battery, Charger DZ: Battery and Charger are sold separately

12Vmax

Blade Cover, Battery, Charger

Li-ion Ah 1.3

UH200DW 200mm (7-7/8") Cordless Hedge Trimmer

Both trimmer blade and shear blade can be attached



Blade Length Strokes Per Minute (SPM) 2.500 Sound Power Level 81.8 dB(A) Vibration Level 2.5 m/s 460x120x130mm (18-1/8"x4-3/4"x5-1/8") Dimensions $(L \times W \times H)$ 1.1 - 1.2kg (2.5 - 2.6lbs) . Net Weight





Fast Charger, Battery Cartridge, Blade Cover, Chip Receiver



UH7580X 750mm (29-1/2") Electric Hedge Trimmer

Limited Qty 419 WW

High power and superior operation



Continuous Rating Input 670W
Blade Length 750mm (29-1/2") Strokes Per Minute (SPM) 3,000 18mm (11/16") Tooth Spacing Sound Power Level 94.5dB(A) 1,157x223x206mm Dimensions (LxWxH) (45-1/2"x8-3/4"x8-1/8") 4.4kg (9.7lbs) Net Weight Power Supply Cord 0.3m (0.98ft)

UH6570X 650mm (25-1/2") Electric Hedge Trimmer

Comfortable operation by ergonomically designed rubberized soft grip 419 WWI



Continuous Rating Input 550W Blade Length 650mm (25-1/2") Strokes Per Minute (SPM) 3,200 Tooth Spacing 18mm (11/16") Sound Power Level Dimensions 97.9dB(A) 1,042x223x206mm (41"x8-3/4"x8-1/8") 3.8 - 3.9kg (8.4 - 8.5lbs) (LxWxH)Net Weight Power Supply Cord 0.3m (0.98ft)





Blade Cover, Hook Complete, Belt Hook, Wire Completed with Plug



Blade Cover, Hook Complete, Wire Completed with Plug

UH5570X 550mm (21-5/8") Electric Hedge Trimmer

Comfortable operation by ergonomically designed rubberized soft grip

419 MM



Continuous Rating Input 550W Blade Length 550mm (21-5/8") Strokes Per Minute (SPM) 3.200 Tooth Spacing 18mm (11/16") Sound Power Level 97.9dB(A) 970x223x206mm (38-1/4"x8-3/4"x8-1/8") (LxWxH)Net Weight 3.7 - 3.8kg (8.2 - 8.4lbs) Power Supply Cord 0.3m (0.98ft)



Blade Cover, Hook Complete, Wire Completed with Plug

EH7500S / SX Single-side Blade Petrol Hedge Trimmer EH7500W Double-side Blade Petrol Hedge Trimmer

The lightest 22.2ml petrol hedge trimmers in compliance with any exhust emission regulations



(Part No.: 196777-4)

Blade Length Engine Power Fuel Tank Capacity 0.4L Strokes Per Minute (SPM) 4390 Tooth Spacing Sound Power Level (LxWxH)

750mm (29-1/2") 22.2mL 0.68kW/1.0PS 101.8dB(A) 1,150x323x212mm (45-1/4"x12-3/4"x8-3/8") 4.9kg (10.8lbs)

Net weight: without fuel



EH6000W 600mm (23-5/8") Petrol Hedge Trimmer

The Lightest 22.2ml petrol hedge trimmer with double-sided blade



Blade Cover, Socket Wrench, Hex Wrench

Blade Length 600mm (23-5/8") Displacement 22 2ml Engine Power 0.68kW/1.0PS Fuel Tank Capacity 0.4L Strokes Per Minute (SPM) 4390 Tooth Spacing Sound Power Level 35mm (1-3/8") 103.2dB(A) 1 119x262x216mm Dimensions (L x W x H) (44"x10-3/8"x8-1/2") Net Weight 5.0kg (11.0lbs)

Net weight: without fuel







Blade Cover, Socket Wrench, Hex Wrench, Net weight; without fuel



EH5000W 500mm (19-3/4") Petrol Hedge Trimmer

The Lightest 22.2ml petrol hedge trimmer with double-sided blade



Blade Length 500mm (19-3/4") Displacement Engine Power 22 2ml 0.68kW/1.0PS Fuel Tank Capacity 0.4L Strokes Per Minute (SPM) 4390 Tooth Spacing Sound Power Leve 35mm (1-3/8") 103.0dB(A) 1 014x262x216mm Dimensions (L x W x H) (40"x10-3/8"x8-1/2") Net Weight 4.8kg (10.5lbs)

Net weight: without fuel







Blade Cover, Socket Wrench, Hex Wrench

EN5950SH 4 stroke Petrol Pole Hedge Trimmer

Short shaft type powered by 25.4mL 4-stroke engine with multi-position engine lubrication system



Blade Cover, Wrenches, Accessory Bag, Oil Set

Blade Length 590mm(23-1/4") Displacement 25.4mL Engine Power Fuel Tank Capacity 0.77kW/1.1PS 0.6L Strokes Per Minute (SPM) 4,200 Sound Power Level 88.0dB(A) 1,780x242x241mm (70"x9-1/2"x9-1/2") Dimensions (LxWxH)Net Weight 6.0kg (13.2lbs) Net weight: without harness and fuel

EN4951SH 25.4mL 4 stroke Petrol Pole Hedge Trimmer

Lightweight and short petrol pole hedge trimmer (2 grips)



490mm(19-1/4") Blade Lenath Displacement 0.77kW/1.1PS Engine Power Fuel Tank Capacity Strokes Per Minute (SPM) 4,200 Sound Power Level 102.2dB(A) 2,050x221x241mm Dimensions (80-1/2"x-3/4"x9-1/2") Net Weight 6.6kg (14.6lbs)

Net weight: without harness and fuel



ver, Socket Wrench, Hex Wrench, Accessory Bag, Oil set (inc. 80mL oil), Shoulder Strap, Safety Goggles, End Cover

EY2650H25H 25.4mL 4 stroke Telescopic Petrol Pole Saw

Telescopic petrol pole saw loaded with a 25.4mL Makita 4-stroke engine




Displacement 25.4 mL Engine Power 0.77kW / 1.1PS Fuel Tank Capacity 0.6 L Guide Bar Length 255 mm (10") Gauge: 1.3mm (.050") Saw Chain Pitch: 3/8" 107.3 dB(A) Sound Power Level 2,720x223x240mm (107"x8-3/4"x9-1/2") (LxWxH). Net Weight 7.2kg (16.0bs)

Net weight: without harness and fuel



Blade Cover, Tool Set, Oil Set, Shoulder Harness, Safety Goggle, harness and fuel





18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width 160 mm (6-5/16") Strokes Per Minute (SPM)

OUTDOOR POWER EQUIPMENT

Continuous Use (min.) Dimensions (LxWxH)

15, 20, 25 mm (9/16", 13/16", 1") 2,500 w/BL1860B: 250 337x177x131 mm (13-1/4"x7"x5-1/8") 1.4 - 1.8 kg (3.2 - 3.9 lbs.)





Grass Receiver, Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

Cordless Grass Shear DUM604

250 minutes continuous run time

Ergonomically designed handle with sure grip

Cutting depth adjustment: 15/20/25 mm



Dual blade action Stain-free grass shear blade

Surface of glittering silver features high anti-abrasion for long lasting coating.



Tool-less blade change system

- Grass shear blade can be removed / installed without tool.
- Hedge trimmer blade can be removed / installed by using a coin to loosen / tighten two screws.





Long handle attachment



Hedge trimmer accessories

Hedge trimmer blade Chip receiver Part No.198408-1 (200mm(7-7/8")) Marie Control Control



Blade cover Part No.451816-0





Blade cover

Long handle attachment with wheel (option)

Enables to use the machine comfortably in a standing posture. • 5 stage angle adjustment allows for grip height adjustment

according to user's height. · Lock-off button operable from both left and right side





Grass shear accessories

Grass shear blade Part No. 195267-4



Grass receiver 160 Part No. 457426-1







UM600DSYEX / DZ 160mm (6-5/16") Cordless Grass Shear

12V max CXT Li-lon Cordless 16 cm (6-5/16") Grass Shear



Cutting Width 160 mm (6-5/16") Strokes Per Minute (SPM) 2,500
Dimensions 329x177x131 mm Dimensions (13"x7"x5-1/8") 1.3 - 1.5 kg (2.8 - 3.3 lbs) Net Weiaht







Base Frame, Blade Cover, Battery, Charge

UM164DW 160mm (6-5/16") Cordless Grass Shear

Both trimmer blade and shear blade can be attached

Li-ion Ah 1.3



Cutting Width Strokes Per Minute (SPM) Dimensions (LxWxH)Net Weight

160 mm (6-5/16") 2,500 292x178x130mm (11-1/2"x7"x5-1/8") 1.1 - 1.2kg (2.5- 2.6lbs)







Fast Charger, Battery Cartridge, Blade Cover, Base Frame

DUP362PT2N/ZN Battery Powered Pruning Shears

18V X2 (36V) LXT Li-Ion Battery Powered Pruning Shears



Max Output Capacity

Cutting Torque

Net Weight

Dimensions (LxWxH)

Max cutting: 33 mm (1-5/16") Max blade opening: 54 mm 250 N 305x43x106 mm (12"x1-11/16"x4-3/16") 0.77 - 0.82 kg

(1.7 - 1.8 lbs.)

200 W







Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool Bag, Battery, Charger, Shear Blade Z: Battery and Charger are sold separately



Makita **PRUNING SHEAR**

DUP361PT2N / ZN 33mm (1-5/16") Cordless Powered Pruning Shears

Smooth cutting similar to that of a hand pruner



Max Output 200W Max cutting : 33mm Capacity Max blade opening: 54mm Dimensions (L x W x H) 305v43v106mm

Net Weight

(12"x1-11/16"x4-3/16") 3.3kg (7.2lbs)









Oil supply, Wrench set, Diamond file, Cord holder complete (for waist belt), Holster, Harness, Arm band, Tool bag, Shear blade (U), Battery, Fast Charger Z: Battery and Charger are sold separately

DUR369LZ Cordless Grass Trimmer

Metal Blade: 255 mm (10")

LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle



Trimmer Head: 430 mm (17") Plastic Blade: 305 mm (12") High: 7,000 No Load Speed (RPM) Med: 5,500

Low: 4,600 Spindle Size M10 x 1.25 LH Max Output
Dimensions (L x W x H) 1.000 W 1,846x400x269 mm (72-1/2"x15-3/4"x10-5/8") Net Weight 5.7 - 6.3 kg (12.6 - 13.9 lbs.)







Cutting Width





Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

DUR368LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Z: Battery and Charger are sold separately

DUR366LZ Cordless Grass Trimmer

Cordless grass trimmer powered by two 18V Li-ion batteries in series



Blade, Universal Guard, Shoulder Harness With Double Shoulder Strap, Wrenches. Z: Battery and Charger are sold separately

DUR365UZ 230mm (9") Cordless Glass Trimmer

Brushless Cordless 3-Speed Grass Trimmer, Bike Handle



Cutting Width Metal Blade: 230 mm (9") Trimmer Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10") High / Medium / Low: No Load Speed (RPM) 6,500/5,300/3,500 M10 x 1.25 LH Spindle Size . Max Output (W) Sound Power Level 550 Metal Blade: 86 dB(A) Plastic Blade: 92.8 dB(A) Nylon Cutting Head: 90 dB(A) Dimensions 1.754x610x460mm (L x W x H) Max Run Time (min) With BL1850B: 490 Net Weight 4.7 kg (10.5 lbs)

Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade, Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt Z: Battery and Charger are sold separately

Brushless Cordless 2-Speed Grass Trimmer, Loop Handle Li-ion Ah 6.0 5.0 3.0 1.5

DUR364LZ Cordless Glass Trimmer

No Load Speed (RPM) High / Low: 6,500 / 5,000 Spindle Size M8 x 1.25 RH Max Output (W) 550 Sound Power Level 89 dB(A) 1,754x310x229mm (69"x12-1/4"x9") With BL1850B: 100 $(L \times W \times H)$ Max Run Time (min) Net Weiaht 4.0 kg (8.8 lbs)

18V 94 \$ \[\frac{1}{2} \times \]





Oil supply, Wrench set, Diamond file, Cord holder complete (for waist belt), Holster, Harness, Arm band, Tool bag, Shear blade (U) Z: Battery and Charger are sold separately





DUR 189Z Cordless Grass Trimmer

LXT BL ADT Cordless Grass Trimmer, Short Telescopic Pipe, Loop Handle



BL XPT ADT

18V MAC) 3 X S

Li-ion Ah 6.0 5.0 3.0 1.5

High: 6,000 Med: 5,000 Low: 4,000 ADT Mode: 4,000 - 6,000 Cutting Width TrimmerHead:300mm(11-3/4") Plastic Blade: 255 mm (10") Spindle Size Max Run Time (min) Max Output Dimensions (L x W x H)

No Load Speed (RPM)

M8 x 1.25 RH Nylon Cutting Head, RÍ 1860R· 168 Plastic Blade, BL1860B: 219 240 W 1,518-1,618x258x396 mm (59-3/4" - 63-3/4"x10-1/8"x15-5/8") Net weiaht 3.0-3.3 kg (6.6-7.3 lbs.)

Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger

DUR187LZ Cordless Grass Trimmer

Low noise and easy handling



Cuttina Width Nvlon Cuttina Head: 300 mm Plastic Blade: 255 mm (10") No Load Speed (RPM) High / Medium / Low / Spindle Size Sound Power Level

ADT Mode: 6,000 / 5,000 /4,000/4,000-6,000 M8 x 1.25 LH Nylon Cutting Head: 84 dB(A) 1,791x258x232mm Dimensions (LxWxH) (70-1/2"x10-1/8"x9-1/8") Max Run Time (min) with BL1860B: 168 Net Weight 3.4 - 3.7 kg (7.5 - 8.2 lbs.)



Shoulder Harness, Nylon Cutting Head, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charger Z: Battery and Charger are sold separately

DUR184LRTE / LZ Cordless Grass Trimmer

Superior maneuverity with short and bent shaft



No Load Speed (RPM) Hiah / Low: 6.000 / 5,000 Cuttina Width Trimmer Head: 300 mm (11-3/4") M8 x 1.25 RH Spindle Size . Sound Power Level 89 dB(A) 1,534-1, Dimensions (LxWxH) 634x258x417mm (60-1/2" - 64-1/2"x 10-1/8"x16-3/8") Max Output 250W With BL1850B: 80 3.1 - 3.4kg (6.8 - 7.5 lbs)

18V S 2 Z T

Fast charger, Battery cartridge, Nylon Cutting Head, Blade guard, Harness, Wrenches, Safety goggles Z: Battery and Charger are sold separately

DUR181RF / Z Cordless String Trimmer

18V LXT Li-Ion Cordless String Trimmer



Cutting Width No Load Speed (RPM) Sound Power Level Dimensions (LxWxH)

260 mm (10-1/4") 7.800 88.5 dB(A) 1.229 - 1.433x267x 186 - 257 mm (48-1/2 - 56-1/2"x 10-1/2"x7-3/8 - 10-1/8") with BL1830B: 45 2.8 - 3.1 kg (6.2 - 6.9 lbs)

Trimmer Head:

Max Run Time (min) Net Weight



UR100DZ Cordless Grass Trimmer

Compact size is ideal for trimming and precise edging

Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Battery, Fast Charger Z: Battery and Charger are sold separately



Nylon Cutting Head : Cutting Width 260 mm (10") Plastic Blade : 230 mm (9") No Load Speed (RPM) 10.000 M8 x 1.25 RH Spindle Size 835-1,195x267x210-315 Dimensions 1.9 - 2.1 kg (4.3 - 4.6 lbs.) Net Weight







Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charqer

UR3000 300mm (11-3/4") String Trimmer

Lightweight AC string trimmers for do-it-yourselfers



Continuous Rating Input 450W Cutting Width
No Load Speed (RPM) 300 mm (11-3/4") 9,000 Sound Power Level 96 dB(A) Dimensions 1,016~1,256x301x262mm (L x W x H) Net Weight (40~49-1/2"x11-7/8"x10-3/8") 2.6kg (5.7lbs) Power Supply Cord 0.3m (1ft)



Extension Cord with Lock, Shoulder Strap, Safety Goggles, Nylon Cord

EM4350RH 43.0mL 4 stroke Backpack Petrol Brushcutter

43.0mL 4-stroke backpack brushcutter for real professionals



Displacement 43.0 mL 1.5kW/2.1PS Engine Power Fuel Tank Capacity 0.8 L M10 x 1.25LH Spindle Size . Sound Power Level 111 dB(A) 358x280x587mm Dimensions (LxWxH) (14-1/8"x11"x23-1/8") 12.0kg (26.6lbs) Net Weiaht

Net weight: without blade, harness and fuel



Blade, Tool Set, Oil Bottle

EBH340U 33.5mL 4 stroke Petrol Brushcutter

33.5ml 4-stroke brushcutter series are launched for real professionals



Displacement 33.5 mL 1.07kW / 1.5PS Engine Power 0.65 L M10 x 1.25LH Fuel Tank Capac Spindle Size 1,900x645x510mm (74-3/4"x25-3/8"x20") Dimensions (L x W x H) Net Weight 7.5kg (16.5lbs)

Net weight: without blade, harness and fuel





Blade, Tool Kit

EBH340R 33.5mL 4 stroke Backpack Petrol Brushcutter

33.5ml 4-stroke backpack brushcutter series for real professionals



Displacement 33.5 mL Engine Power 1.07kW / 1.45PS Fuel Tank Capacity 0.65 L Spindle Size M10 x 1.25LH Dimensions 400x325x395mm (15-3/4"x12-3/4"x15-1/2") Net Weight 9.8kg (21.6lbs)

Net weight: without blade, harness and fuel

EM2600U 25.7mL - Petrol Brushcutter

 $\label{prop:comply} \mbox{Equipped with catalytic muffler to comply with strict exhaust emission regulations}$ Displacement 25.7mL Engine Power 0.83kW/1.2PS Fuel Tank 0.6L Spindle Size M8 x 1.25LH Sound Power Level 107.29db(A) 1,770x610x410mm (69-3/4"x24"x16-1/8") (LxWxH)Net Weight 5.0kg (11.0lbs)

Net weight :without guard, cutting tool, shoulder harness and fuel



Star Blade (4 Tooth Metal Blade), Nylon Cutting Head, Socket Wrench, Hex Wrench, Shoulder Harness With Single Shoulder Strap, Guard (Protector)







Blade, Tool Kit

EM2654LH 25.4mL 4 stroke Petrol Brushcutter

Maneuverable pole and handle



Displacement Max Output Fuel Tank Capacity Oil Tank Capacity
Cutting Width Metal Blade Cutting Width Nylon Cutting Head Spindle Size

(LxWxH)Net Weight

0.77kW(1.1 HP)@7,000RPM 0.6 L (20.3 oz.) 230 mm (9-1/16") 420 mm (16-1/2")

25.4 mL

M10 x 1.25 LH Sound Power Level 111.3 dB(A) 1,765x368x293mm (69-1/2"x14-1/2"x11-1/2") 5.2 kg (11.5 lbs)

Net weight: without blade, harness and fuel

Blade, Blade cover, Harness, Socket wrench, Hex wrench, Oil bottle

EM2650UH / LH 25.4mL 4 stroke Petrol Brushcutter

Maneuverable pole and handle





Displacement

25.4 mL 0.77 kW (1.1 HP)@7,000 RPM 0.6 L (20.3 oz.) 0.08 L (2.7 oz.) 230 mm (9-1/16") M10 x 1.25 LH 105.5 dB(A) 1,765x620x474mm (69-1/2"x24-3/8"x18-2/3") 5.5 kg (12.1 lbs)

Net weight: without blade, harness and fuel







Cordless Multi Function Power Head

consisting of power head and versatile optional attachments are ideal for a wide range of applications











EX2650LHM 25.4mL- 4 stroke Multi Function Power Head

Environment-friendly and cost-saving 25.4cc 4-stroke engine



Displacement 25.4 mL Engine Power 0.77kW / 1.1PS Fuel Tank Capacity 0.6 L 975x323x241mm (38-3/8"x12-3/4"x9-1/2") $(L \times W \times H)$ 4.6kg (10lbs)

Net weight: without blade, harness and fuel

Harness, Socket Wrench, Hex Wrench, Oil set, Accessory Bag

Chain oil

With Makita chain oil, chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. (Not available in Austria)



Size	Part No.
100ml	182229-1
1L	988002656

UM600D, UH201D, DUM604

Hedge trimmer blade

Chip receiver

Blade cover



High-performance two-stroke engine oil 50:1

*with measuring cup

Makita High-performance two-stroke engine oil is semi-synthetic oil with excellent lubricating qualities, low smoke and low carbon residue. Contains additives that e ect fuel stabilization.





Size	Part No.
1L	980008607

Grass shear blade

Grass receiver 160



Blade cover

Fuel mixture



Size	Part No.
1L	456236-3

Long handle attachment



4-Stroke Oil



Size	Part No.
600ml	980508620

Description	Part No.
Hedge trimmer blade	198408-1
Chip receiver	198401-5
Blade cover	451816-0
Grass shear blade	195267-4
Grass receiver 160	457426-1
Blade cover	452055-5
Long handle attachment	198468-1

Chip receiver assembly set

Keeps branch or leaf debris from scattering around.

• Attachable to either side of the blade





Toothed edge

designed like saw teeth can catch and prevent leaf or twig debris from falling over the edge of chip receiver.





Anti-slide ribs

on the bottom plate prevents leaf or twig debris from sliding and slipping out of chip receiver.

Model	Description	Additional Information	Part No.
UH201D, UM600D, DUM604,	One Touch Installation / Removal	-	198401-5
UH353D	One Touch Installation / Removal	-	126834-4
DUH502, DUH601, DUH602, DUH751, DUH752	One Touch Installation / Removal	-	199151-5
DUH523	With Binding Head Screw (M5 x12 x 5pcs)	-	195050-9
DUH551, DUH651	One Touch Installation / Removal	-	194681-1
DUH604S	-	-	191D33-1
DUH754S	-	-	191D34-9
EH6000S, EH7500S	-	Without Blade Guard	451866-5
EH6000S	-	With Blade Guard	452165-8
EH7500S	-	With Blade Guard	452166-6
EH7500S	With Binding Head Screw (M5 x12 x 5pcs)	Without Blade Guard	196777-4
EH7500W	With Binding Head Screw (M5 x12 x 5pcs)	With Blade Guard	195321-4

Shear blade & Blade cover for Hedge Trimmer





- *with clank cover
 **for blade without end cover
- ***for blade with end cover



Model No.	Blade assembly	Blade cover	
Model No.	Part No.	Part No.	
AC Hedge Trimmer			
UH4261	194660-9		
UH5261	194663-3	450489-6	
UH5570	194671-4		
UH5580	194673-0		
UH6580	194666-7	450400 1	
UH6570	194675-6	450490-1	
UH7580	194675-6		
Pole Hedge Trimmer (Cordless, Petrol, Multi-tool	attachments		
EN420MP	198195-2	-	
Cordless Hedge Trimmer			
UH201D	198408-1	451816-0	
UH353D	196879-6	458359-3	
DUH502	199598-3	459120-1	
DUH523	195769-0	452685-2	
DUH551	125443-6	450489-6	
DUH601	199099-1	458414-1	
DUH602	199599-1	459121-9	
DUH604S	191D38-1	412355-5	
DUH651	196688-3	450490-1	
DUH751	199100-2	458415-9	
DUH752	199600-2	459122-7	
DUH754S	191D39-9	412356-3	

Nozzle assembly A:Standard equipment



Model No.	Size(mm)	Туре	Part No.
DUB182, DUB142, UB1100,	220	Α	132025-7
UB1101, UB121D, UB141D, UB181D	430	-	134182-7
UB1102, UB1103	220	Α	123245-4

Long attachment handle (Extension handle kit) Photo:198486-1



*with grass Shear blade

Model No.	Part No.
DUM604, UM600D, UM603D, *UH201D	EU:198486-1

Rotary lawn mower blade



Model No.	Size(mm)	Part No.
Cordless Lawn Mower		
DLM380	380	196863-1
DLM382	380	191D41-2
DLM431	430	197761-2 EU:197762-0
DLM432	430	191D43-8
DML460	460	199367-2
DLM462	460	199367B2
DLM530, DLM531, DLM532, DLM533	530	191D52-7
Electric Lawn Mower		
ELM3320	330	YA00000745
ELM3720	370	YA00000746
ELM4121	410	YA00000738
ELM4620	460	YA00000741
Petrol Lawn Mower		
PLM4620N2, PLM4621N2, PLM4622N2, PLM4626N, PLM4627N, PLM4628N, PLM4630N2, PLM4631N2, PLM4632N	460	DA00001274

Base frame





*with grass Shear blade

Model No.	Part No.
UM164D, *UH200D	325896-1

String trimmer head (for grass, light weeds)

* with adapter (Poly bag with header)

	Description	Ref.	Size	Arbore size	Model No.	Cord/ Line		Part No.
Bump & Feed	There is no need to ever split the trimmer head to replace or remove line. This head is simple to operate with reliability in performance.	UN-74L	4.4"	M10x1.25LH	DUR365U, DUR366L, DUR368A/L, DUR369A/L/N, EBH252U/L, EBH253U/L, EBH341U, EM3400L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3.6m	-	196324-1
Bump & Feed	-		3"	M8x1.25RH	UR100D	1.65mm x 8m	Poly bag with header	198853-0 EU:198854-
6	0	95-M10L	4"	M10x1.25LH	DUR365U, DUR366L, DUR368A/L, DUR369A/L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2651UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Poly bag with header	197804-0 EU:197993-
Bump & Feed	•	Bump & Feed ECO 4R	4" Low profile	M8x1.25RH	DUR189, DUR364L	2.0mm x 3m	Poly bag with header	197297-1
		Bump & Feed ECO 4L	4" Low profile	M10x1.25LH	DUR365U, DUR366L, DUR368A/L, DUR369A/L/N, UR101C, UR201C, UR202C	2.0mm x 3m	Poly bag with header	197296-3
		Bump & Feed Z5L	5"	M10x1.25LH	EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Blister pack	B-05131
Automatic feed and Bump & Feed	Line will be feeded about 3cm, in either	Ultra Auto 4R	4"	M8x1.25RH	ER2550L, ER2650L, ER2600L, ER400MP	2.4mm x 3m	Carton box	B-03006
	one of the following cases -Head rotaition are reached at 8,500rpmBottom of the head is bumped on the	Ultra Auto 4L	4"	M8&10x1.25 LH	DUR187U/L, DU188U/L, EM2500U/L, EM2600U/L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Carton box	*B-02945
	ground when it is spinning.	Ultra Auto 6L	6"	M10x1.25LH	EBH340R, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	3.0mm x 2m	Blister pack	*A-81658





-	5"	·	EBH252U/L, BH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U/R, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 0.75m x 2	Carton box	B-02951
-	4"	M8x1.25LH	DUR187U/L, DU188U/L, EM2500U/L, EM2600U/L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.0mm x 4m	Cardboard	191D91-7
-	4"	M8x1.25RH	DUR189, DUR364L, ER2550L, ER2650L, ER2600L, ER400MP,	2.0mm x 4m	Cardboard	191D92-5
-	4"	M10x1.25LH	DUR365U, DUR366L, DUR368L, DUR369L, EBH252U/L, EBH253U/L, EM2500U/L, EM2510LH, EM2511LH, EM2600U, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR101C, UR201C, UR202C, EM400MP, EM401MP, M403MP, EM404MP, EM405MP, EM406MP,	2.0mm x 4m	Cardboard	191D89-4
-	4"	M10x1.25LH	DUR365U, DUR366L, DUR368L, DUR369L, EBH252U/L, EBH253U/L, EM250U/L, EM2511LH, EM260U, EM255UH/LH, EM2651UH/LH, EM2651UH/LH, EM2654LH, UR101C, UR201C, UR202C, EM400MP, EM401MP, M403MP, EM404MP, EM405MP, EM406MP,	2.4mm x 3m	Cardboard	191D90-9
-	5"	M10x1.25LH	EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC411U, RBC411U, RBC411U, EM400MP, EM401MP, EM403MP, EM404MP, EM403MP, EM406MP	2.4mm x 4m	Cardboard	191D93-3

Cordless string trimmer

	Spindle	Receive V	Vasher	Grass Guard	
Model No.	Size	Size (mm)	Parts No.	(5 : 11/1	
DUR182L	M8X1.25LH	41	324917-6	346622-5	
DUR184L	M8X1.25LH	36.5	326683-1 144512-4	346857-8	
DUR187L	M8X1.25LH	36.5	144512-4	346857-8	
DUR189	M8X1.25RH	36.5	144512-4	346857-8	

	Spindle	Receive W	/asher	Grass Guard	
Model No.	Size	Size (mm) Parts No.		for Receive Washer	
DUR364L	M8X1.25RH	44	319245-2	346857-8	
DUR365U, DUR366L	M10X1.25LH	42	326518-6 140L84-9	346622-5	
DUR368L	M10X1.25LH	-	140L84-9	-	
DUR369L	M10X1.25LH	64.5	144312-2	-	


Nylon cord



Size	Part No.
1.65mmx15m	DA0000003
2.4mmx5m	B-01971
3.0mmx4m	B-07375

Four-leaf clover-like cross section

Spiral cord body



Size	Color	Part No.
1.65mm x 15m	Blue	198859-8 / EU: 198860-3
2.0mm x 15m	Green	197472-9
2.0mm x 30m	Green	197473-7
2.4mm x 15m	Orange	198501-1
2.4mm x 30m	Orange	198502-9
1.65mm x 15m	Blue	E-01731
2.0mm x 15m	Green	E-01769
2.0mm x 30m	Green	E-01775
2.4mm x 15m	Orange	E-01797

Brushcutter blades Hole Dia.: 25.4mm * Japanese Package

	Application	Blade dia. / No. of teeth	Thickness	Model No.	Part No.
2-tooth blade					
·	for tall, thick grass, scrub and tangled undergrowth	230mm / 2	2.0mm	BBC231U, BBC300L, BC231UD, BC300LD, DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	197808-2 D-66058
3-tooth blade					
A	for tall, thick grass, scrub and tangled undergrowth	230mm / 3	3.0mm	BBC231U, BBC300L, BC231UD, BC300LD, DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	195298-3 D-66020
4-tooth blade					
Principal	for tall grass and	230mm / 4	1.8mm	BBC231U, BBC300L, BC231UD, BC300LD, DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14118 D-66008
ndy.	scrub	255mm / 4	2.0mm	EBH340U/R, EBH341L/U/R EM2901LH/UH EM2904LH, EM3400U/L, EM4350UH/LH/RH , EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14124
8-tooth blade					
Tuation (for thick grass and	230mm / 8	1.8mm	BBC231U, BBC300L, BC231UD, BC300LD, DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14130
	scrub	255mm / 8	2.0mm	EBH340U/R, EBH341L/U/R, EM2901UH/LH, EM3400U/L, EM4350UH/LH/RH , EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14146
Saw blade					
10	for bushes and thin tree trunks	230mm / 80	1.8mm	BBC231U, BBC300L, BC231UD, BC300LD, DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14152
The state of the s	Not available in some countries due to local regulation	255mm / 80	2.0mm	EBH340U/R, EBH341L/U/R, EM2901LH/UH EM2904LH, EM3400U/L, EM4350UH/LH/RH , EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14168
TCT Saw blade					
(F)	for gnarled bushes and thin tree trunks	230mm / 36	1.25mm	EBH252U, EBH253U, EBH340U/R, EBH341U/L, EBH341R, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650L/U, EM2651L/U, EM2653LH, EM2654LH, EM4340L	A-48321 D-65981
	Not available in some countries due to local regulation	250mm / 40	1.25mm	EBH340U/R, EBH341L/U/R, EM2901LH/UH EM2904LH, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	A-48337

^{*}Special flunge (Dia: 20mm) ••• Part No.332051-8 (Including Chisel blade guard set 196480-7,196481-5)

Edger blade



Blade dia. / No. of teeth	Thickness	Model No.	Part No.
203mm / 2	2.5mm	EE2650H, EE400MP	196745-7

Protection guard

Shape	Туре	Model No.	Description	Part No.
Extension for Trimmer head	Universal	EBH252U, EBH253U, EM2650LH/UH, EM2651LH/UH, EM2510LH, EM2511LH, EM2653LH, EM2654LH, EBH341U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP	Toolless / With cord/line cutter	135398-7
		EBH340U, EM3400U/L, RBC411U	Toolless / With cord/line cutter	140424-9
		EM2500U/L, EM2600U/L	Without cord/line cutter	DA00000526
for Cutting blade	Exclusive	EBH340R	-	XNR0000302
for Trimmer head	Exclusive	UR100D	With cord/line cutter	135950-1
6		DUR184L DUR189	Without cord/line cutter	456651-1
Conversion kit for Cutting blade (Protector for		EM2510LH, EM2511LH, EM2653LH, EM2654LH	-	197806-6 EU:197995-7
Cutting blade, Protector clamp and blade clamping washer & nut.)		EM405MP, EM406MP	Narrow type / Without cord/line cutter	457273-0

Replacement plastic blade



Model No.	Per pkg.	Part No.
DUR187L, DUR187U, DUR188L, DUR188U, DUR189, DUR364L, DUR365U, DUR366U, EM403MP, FM404MP FM405MP FM406MP	12	198427-7

Spool assembly





Model No.	Part No.
UR3000	DA0000001
UR140D, DUR141, UR180D, DUR181	196146-9

Shoulder strap assembly

Single 125516-5



*Poly bag with header

, ,		
Type	Model No.	Part No.
Single	DUR141,DUR142L/U, DUR143U, DUR181, DUR182L/U, DUR183L/U, DUR184L, DUR187L, DUR188L, DUR189, DUR364L, DUR365U, DUR366L, DUX60L, EBH252L, EBH253L, EBH341L, EM2510LH, EM2551LH, EM2650LH, EM2651LH, EM2653LH, EM2654LH, EM2901LH/LHN/UH EM2904LH, EM3400L, EN4950H, EN4951SH, EY2650H, EX2650LH, RBC411U, RBC412U, UR100D, UR140D, UR180D	125516-5

File and File holder

For Model: Chain saw *with gurip



Cave shain tuna	Cimo	File	File and File holder
Saw chain type	Size	Part No.	Part No.
	4mm	*744003-1	-
25F, 25AP, 91PX, 91VLX, 466, 492, 196	4mm	D953003090	195089-2 D953030010
	4mm	D-67365	-
90PX, 33SL, 34SL, 291	4.5mm	D953003100	195923-6 D953030020
20BPX, 21BPX, 21LPX, 95VPX, 082, 086, 686, 484	4.8mm	D953003070	197712-5 D953003070
72, 73, 75DPX, 75LPX	5.2mm	D-67424	-
72DPX, 72LPX, 72V, 73DPX, 73LPX, 496, 093, 099	5.5mm	953003040	D953003040

File handle, Flat file & Depth gauge jointer

For all saw chain







File handle	Flat file	Depth gauge jointer
Part No.	Part No.	Part No.
D953004010	D953003060	D953100090

Guide Bar / Chain Blade / Guide Bar Cover



	7711	rkita.	13									
Carving bar				Cutter type SC: S	Semi chis	el FC: F	ull chise	I				
	Guid	de Bar			Saw Ch	nain				File	File	
For Models	Bar length	Part No.	No.of drive links	gauge	pitch	Cutte	er type	Saw Chain Part No.	Bar Cover Part No.	diameter, 1st half of top plate	diameter 2nd half of top plate	
Electric Chain Saws												
PLICATO	25cm/10"	168407-7	60	1.3mm/0.050"	1/4"	25AP	SC	194098-8	452093-7	4.0mm	4.0mm	Carving bar
BUC250	25cm/10"	168408-5	40	1.3mm/0.050"	3/8"	91VG	SC	196205-9	452093-7	4.0mm	4.0mm	Sprocket
UC120D, BUC121, BUC122	16cm/6-1/4"	158476-6	42	1.3mm/0.050"	1/4"	25AP	SC	791284-8	416311-7	4.0mm	4.0mm	-
UC3510A, UC3520A	35cm/14"	165246-6	52	1.1mm 0.043"	3/8"	90SG	SC	531 291 652	419288-5	4,5mm	4,0mm	Sprocket
UC4010A, UC4020A	40cm/16"	165247-4	56	1.1mm 0.043"	3/8"	90SG	SC	531 291 656	419242-9	4,5mm	4,0mm	Sprocket
UC3020A	30cm/12"	165200-0	46	1.3mm/0.050"	3/8"	91VG	SC	531 492 646	419288-5	4.0mm	4.0mm	-
UC3520A	35cm/14"	165201-8	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	419288-5	4.0mm	4.0mm	-
UC4020A	40cm/16"	165202-6 422 040 661	56	1.3mm/0.050"	3/8"	91VG	SC	531 492 656	419242-9	4.0mm	4.0mm	-
UC3500, UC3530A	35cm/14"	165201-8 442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	952 010 630	4.0mm	4.0mm	-
UC4030A	40cm/16"	165202-6 442 040 661	56	1.3mm/0.050"	3/8"	91VG	SC	531 492 656	419242-9	4.0mm	4.0mm	-
5012B	30cm/12"	164533-0	45	1.3mm/0.050"	3/8"	91VG	SC	791172-9	410054-3	4.0mm	4.0mm	-
5016B	40cm/16"	341650-5	56	1.3mm/0.050"	3/8"	91VG	SC	196521-9	410054-3	4.0mm	4.0mm	-
DUC302	30cm/12"	165245-8	46	1.1mm/0.043"	3/8"	90SG	SC	531 290 046	419288-5	4.5mm	4.0mm	Sprocket
5014B	35cm/14"	345159-9	52	1.1mm/0.043"	3/8"	90SG	SC	791091-9				Sprocket
Petrol Chain Saws												
DCS231T	25cm/10"	168408-5	40	1.3mm/0.050"	3/8"	91VG	SC	196205-9	452093-7	4.0mm	4.0mm	Sprocket
DCS330TH	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	952 100 633	4.0mm	4.0mm	-
DCS3400TH, DCS3410TH	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	952 010 630	4.0mm	4.0mm	-
DCS3400, DCS3410	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	952 010 630	4.0mm	4.0mm	-
EA3201S-35, DCS33, DCS34, DCS330, DCS330, DCS340,	30cm/12"	442 030 661	46					531 492 646	952 010 640			
DCS341, DCS344, DCS390,	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	531 492 652	952 010 640	4.0mm	4.0mm	-
DCS400, DCS401	40cm/16"	442 040 661	56					531 492 656	952 010 640			
DCS3500, DCS3501	35cm/14" 40cm/16"	442 035 661 442 040 661	52 56	1.3mm/0.050"	3/8"	91VG	SC	531 492 652 531 492 656	952 010 630 952 010 640	4.0mm	4.0mm	-
DCS43, DCS52, DCS430,	38cm/15"	443 038 651	56	1.3mm/0.050"	3/8"	91VG	SC	523 093 656	952 020 650	5.5mm	4.8mm	_
DCS431, DCS520	45cm/18" 38cm/15"	443 045 651 443 038 651	64 56					523 093 664 522 094 656	952 020 650 952 010 640			
DCS4300i, DCS5200,	45cm/18"	443 045 651	64	1.5mm/0.058"	3/8"	73DP	SC	522 094 664	952 020 640	5.5mm	4.8mm	-
DCS5200i, DCS6000i, DCS6800i	38cm/15" 45cm/18"	443 038 651 443 045 651	56 64	1.5mm/0.058"	2 /0"	721 D	FC	528 099 656 528 099 664	952 010 640 952 020 640	F F	4 0	
D C 500001	60cm/24"	445 060 451 445 060 455	84	1.5111111/0.058	3/8"	73LP	FC	528 099 684	952 020 660	5.5mm	4.8mm	-
	45cm/18"	445 045 655	72	1.3mm/0.050"	0.325	95VP	-	512 484 772	952 020 650	5.5mm	4.8mm	-
EA6100, EA7900, DCS6400, DCS6401,	45cm/18"	445 045 655	68					528 099 668	952 020 650			
DCS6400H, DCS7300, DCS7300H, DCS7301,	50cm/20" 60cm/24"	445 050 655 445 060 655	72 84				FC	528 099 672	952 020 650 952 020 660			-
DCS7900, DCS7900H, DCS7901, PS7300,	70cm/28"	455 070 455	94	1.5mm/0.058"	3/8"	73LP		528 099 694	952 030 680	5.5mm	4.8mm	
PS7900	60cm/24"	445 060 451 445 060 455	84					528 099 684	952 020 660			Solid
	70cm/28" 50cm/20"	455 070 455 443 050 652	94 72	1.5mm/0.058"	3/8"	73LP	SC FC	528 099 694 528 099 672	952 030 680 952 020 650			-
DCS9000, DCS9010,	60cm/24"	443 060 652	80	16mm/0.063"	0.404	59CP	SC	528 099 680	952 020 660	5.5mm	4.8mm	_
PS9010	76cm/30"	443 076 422	92	1.5mm/0.058"	3/8"	73LP	FC	528 099 696 522 103 792	952 030 680	5.511111	4.011111	
EA4301F	45cm/18"	442 045 661 445 045 655	62 72	1.3mm/0.050"	3/8" 0.325"	95VP	SC	531 492 662 512 484 072	-	-	-	Sprocket -
DCS430, DCS460,	45cm/18"	445 045 451		1.5mm/0.050"	3/8"	73LP	FC	528 099 664				Solid
DCS520, 109	43CHI/ 10	443 045 651	64	1.5mm/0.058"	3/0	73DP	SC	523 093 664		-		Sprocket
DCS6000I, DCS6400, DCS6401, PS6400	50cm/20"	445 050 455 445 053 451	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	- Solid
DCS520, DCS6000I, 111	53cm/21"	443 053 451	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	Sprocket
EA3201S	40cm/16"	165247-4	56	1.1mm/0.043"	3/8"	90SG	SC	531 291 656	419242-9	4.5mm	4.0mm	-

			Guide Bar			Saw Chain			Bar Cover	Drive sprocket			
Model No.	Bar length	Motor Mount	Туре	Part No.	No.of drive links	gauge	pitch	Type OREGON / DOLMAR	Cutter type	Part No.	Part No.	Туре	Part No.
Cordless Chair	n Saws												
UC120D,	16cm/ 6-1/4"	-	without Sprocket	158476-6	42	1.3mm/ .050"	1/4"	25AP / 466	MC	791284-8	416311-7	Sprocket	221504-1
DUC121, DUC122	16cm/ 6-1/4"	-	without Sprocket	158476-6	42	1.3mm/ .050"	1/4"	25AP / 466	MC	791284-8	416311-7	Sprocket	221527-9
	25cm/10"	-	Solid carving bar	168407-7	6	1.3mm/ .050"	1/4"	25AP / 466	MC	194098-8	452093-7	-	-
DUC204 DUC254	20cm/8"	A041	Sprocket nose bar	-	33	1.1mm/ .043"	3/8"	90PX / 291	СС	-	-		
DUC254C	25cm/10"	A041	Sprocket nose bar	-	40	1.111111/ .043	LP	90FX / 291	cc	-	452093-7	-	-
	25cm/10"	A041	Sprocket nose bar	168408-5	40	1.3mm/ .050"	3/8" LP	91PX / 492	CC	196205-9	452093-7		
BUC250,	25cm/10"	-	Solid carving bar	168407-7	60	1.3mm/ .050"	1/4"	25AP / 466	MC	194098-8	452093-7	-	-
UC250D, BUC300,	25cm/10"	A041	Sprocket nose bar	168408-5	40	1.3mm/ .050"	3/8" LP	91PX / 492	CC	196205-9	452093-7		
UC300D, DUC252, DUC302	30cm/12"	A041	Sprocket nose bar (Micro-Lite)	165245-8	46	1.1mm/ .043"	3/8" LP	90PX / 291	СС	196740-7	-	Sprocket	221526-1
	25cm/10"	-	Solid carving bar	168407-7	60	1.3mm/ .050"	1/4"	25AP / 466	MC	194098-8	452093-7	Sprocket	-
	30cm/12"	A041	Sprocket	165245-8	46					196740-7	419288-5		
DUC303,	35cm/14"	A041	nose bar	165246-6	52	1.1mm/ .043"	3/8" LP	90PX / 291	CC	531291652	419288-5		
DUC306, DUC353,	40cm/16"	A041	(Micro-Lite)	165247-4	56					531291656	419242-9		
DUC355 DUC400	30cm/12"	A041		165200-0	46			91PX / 492	91PX / 492 CC	531492646	419228-5	Sprocket	199063-2
	35cm/14"	A041	Sprocket nose bar	165201-8	52	1.3mm/ .050"	3/8" LP			196207-5	419288-5		
	40cm/16"	A041		165202-6	56					531492656	419242-9		
Electric Chain	Saws												
	30cm/12"	A041	Sprocket	165245-8	46					196740-7	419288-5		
	35cm/14"	A041	nose bar	165246-6	52	1.1mm/ .043"	3/8"	3/8" 90PX / 291	DPX / 291 CC	-	419288-5		
UC3041A, UC3541A,	40cm/16"	A041	(Micro-Lite)	165247-4	56					-	419242-9	_	_
UC4041A	30cm/12"	A041	Concelent	-	46					-	419288-5		
	35cm/14"	A041	Sprocket nose bar	165201-8	52	1.3mm/ .050"	3/8"	91PX / 492	CC	- 4	419288-5		
	40cm/16"	A041		165202-6	56					-	419242-9		
UC3050A, UC3550A,	30cm/12"	A041		-	46					-	419288-5		
UC4050A, UC4550A,	35cm/14"	A041	Sprocket	165201-8	52	1.3mm/ .050"	3/8"	91PX / 492	CC	-	419288-5	Sprocket	221521-1
UC3051A, UC3551A,	40cm/16"	A041	nose bar	165202-6	56	, 1030	5,0			-	419242-9	эргоскет	221321-1
UC4051A, UC4551A	45cm/18"	A041		-	-					-	419242-9		



DUX60	
Power sweep attachment	
Power brush attachment	
Brushcutter	
String trimmer	
Ground trimmer	A CONTRACTOR OF THE PARTY OF TH
Hedge trimmer	Server Harriston Control of the Cont
Hedge trimmer	
Pole saw	
Cultivator	*
Edger	0
Coffee harvester	No.
Shaft extension attachment	

Description	Part No.
Power sweep attachment (SW400MP)	199344-4
Power brush attachment (BR400MP)	199323-2
Brushcutter (EM400MP)	195658-9
Brushcutter (EM402MP)	195952-9
String trimmer (ER400MP)	195530-5
Ground trimmer (EN420MP)	198061-3
Hedge trimmer (EN410MP)	197742-6
Hedge trimmer (EN401MP)	196341-1
Pole saw (EY401MP)	199925-4
Cultivator (KR400MP)	195716-1
Edger (EE400MP)	196750-4
Coffee harvester (EJ400MP)	195726-8
Shaft extension attachment (LE400MP)	196031-6 / 191E25-0

PM7650H

Nozzle for blower



Description	Part No.
Flat pipe	455634-8
End pipe 450	455632-2
End pipe 200	455631-4

Nozzle for blower



Description	Part No.
Nozzle set (0.7, 0.8)	196499-6
Nozzle set (0.5)	196616-8

Various pipes



Description	Part No.
Straight pipe 630	453699-4
Straight pipe 380	453700-5
Bent pipe 630	453507-9



Model No.	Part No.
UB1102, UB1103	196729-5
DUB143, DUB183	TP00000199

Vacuum attachment

Model No.	Description	Part No.
BHX2500, BHX2501	Vacuum set	197234-5 EU:197235-3
LIBORO1	Vacuum pipe assembly	GT00000011
UB0801	Dust bag assembly	GT00000013

Dust Bag



Model No.	Part No.
UB1100,UB1101	122321-1
DUB142, DUB182	122814-8

Vacuum kit set



Flexible hose set (Total length: 95cm)



Model No.	Part No.
DUB142, DUB182, UB1100, UB1101	191750-9

Blower

Model No.	Description	Part No.
	Extension Nozzle	197888-8
DUB362	Flat nozzle	197889-6
	Shoulder belt	166094-6
DUB363	Extension Nozzle	197888-8
505303	Flat nozzle	197889-6

EB5300TH/WH, EB7660TH/WH





196911-6

End nozzle 90-62



198034-6

Long pipe 90 set



197723-0

Short pipe 90 set



196912-4

Makita



Earth Auger Bit & Cordless Impact Wrench DTW1001 esignedfor igging holes and easy manipulate the soil It is suitable for install fence posts or poles to support trees Other Benefit: Create conditions for healthier plant growth as it "pulverize" the soil, roots can quickly settle in. Compatible with Looser soil also allows for better absorption of DTW1001RTJ/Z moisture and nutrients, and reduces the risk of Cordless Impact Wrench runoff and erosion. DTW1001RTJ / Z 19mm (3/4") Cordless Impact Wrench Earth auger drill set 3/4" 18V LXT BL Brushless Cordless 3-Speed 3/4" (19 mm) 1,050 N·m Impact Wrench (Comes with socket, pin and O-rings) Li-ion Ah 6.0 5.0 3.0 1.5 Fastening Capacities Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1") Sauare Drive 19 mm (3/4") Hard/Medium/Soft: **Working length** Bit Dia. (mm) Length (mm) Part No. No Load Speed (RPM) (mm) 0-1,800/0-1,000/0-900 Hard/Medium/Soft: Impacts Per Minute (IPM) 20 600 530 B-54302 0-2.200/0-2.000/0-1.800 1,050 N·m (780 ft.lbs.) Max Fastening Torque 600 530 B-54318

109 dB(A) 229x91x289mm

(9"x3-5/8"x11-3/8") 3.4kg (7.6lbs)



Sound Power Leve

(LxWxH) Net Weight

Fast charger, Battery cartridge (Tool does not come with socket). Z: Battery and Charger are sold separately

DJR183RTE / Z Cordless Recipro Saw

Two switch levers are available with variable speed control

600

600

600



30

35

40



Pipe: 50 mm (2") Capacity Wood: 50 mm (2") Length of Stroke 13 mm (1/2") Strokes Per Minute (SPM) 0-3,000 392x81x209 mm Dimensions (LxWxH) Net Weight (15-1/2"x3-3/16"x8-1/4") 1.5 - 1.7 kg (3.3 - 3.8 lbs)

530

530

530

B-54324

B-54330

B-57576



6



Fast Charger, Battery Cartridge X2, Recipro Saw Blades Z: Battery and Charger are sold separately

Portable Power Pack PDC01

Powered by up to four 18V LXT batteries



Battery cover

protects batteries inside the battery box from water and dust.





Fuel gauge for each battery

indicates the battery status by two green lamps.

Intermediate connector

If the cord of the tool adapter is loaded with a certain weight or over, the intermediate connector between the tool and the tool adapter is automatically disconnected.



Backpack harness can be detached from the

battery box, allowing for use as a stationary power pack.

Main power switch

with auto-off function.

Pocket

Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.

Tool adapter with pivoting cord

- designed for use with a variety of tools.
- increases the maneuverability of a connected tool.







PDC01 Portable Power Pack

18V / 18V X2 (36V) / 40Vmax LXT XGT Li-lon Portable Power Pack

Li-ion Ah 6.0 5.0 3.0 1.5



24/12 Ah Capacity Energy Capacity
Dimensions (LxWxH) Net Weight

432 Wh 400x195x132 mm (15-3/4"x7-5/8"x5-3/16") 1.7 kg (5.6 lbs.)

Harness, Adapter



Cordless High Pressure Washer DHW080

GENERAL EQUIPMENT



Total amount of water flow under normal use on a full battery charge

Run time (w/BL1850Bx2) 28 about min

3.0 MPa



Working Pressure Run time (w/BL18508x2)

5.5 MPa 12.5

Total amount of water flow under normal use on a full battery charge

Suction tank function + storability



Easy to transport


Transportable with the machine body stored in the tank.



*When carrying the storage box by the handle, water may spill out if there is plenty of water inside

*When carrying this model located on the lid of the storage box by the handle, the model may drop off from the storage box.

DHW080ZK Cordless High Pressure Washer





Li-ion Ah 6.0 5.0 3.0 1.5

Max Permissible Pressure8.0 MPa (N/A bars)Regular Pressure (MPa)High: 5.5Low: 3.0Max Water Flow380 L/h (6.3 L/min)

Regular Flow High: 330 L/h (5.5 L/min) Low: 240 L/h (4.0 L/min) Pump Speed (RPM) High: 3,450 Low: 2,390

Max Feed Temperature 40 °C (N/A °F)
Max Run Time (min) w/ BL1860B X2
High: 15
Low: 34
Max Output 800 W

 Max Output
 800 W

 Dimensions (L x W x H)
 438x218x269 mm

 (17-1/4"x8-5/8"x10-5/8")

 Net Weight
 7.1-7.7 kg (15.6-17.0 lbs.)

Trigger Gun, High Pressure Hose 5 m, Suction Hose, Cleaner Pin, Storage Box, Variable nozzle, Connector, One touch joint, Battery, Charger, Z: Battery and Charger are sold separately

HW 151 High Pressure Washer

Compact design, large operating range and efficient cleaning performance



Continuous Rating Input 2,500W
Max Pressure 150MPa (2,175 PSI)
Max Flow Rate 500 L/hr
Motor Type Induction
Sound Power Level 88dB(A)
Max Input Temperature 50°C
High Pressure Hose Length
Net Weight 26.9kg (23.3lbs)

HW132 High Pressure Washer

Steel reinforced spray gun

18V 2



 Continuous rating input
 2,100W

 Max Pressure
 14 MPa (140 bar, 2,030 PSI)

 Net Weight
 18.8 kg (41.4 lbs)

HW1300 High Pressure Washer

High Pressure Washer with Self-Priming Function



Continuous Rating Input 1,800W Max Flow Rate 420 L/hr Pump Speed High: 3,500 Low: 1.750 Regular Pressure High: 11.0MPa Low: 8.0MPa

CB-203 ////

High Pressure Hose Length Net Weight

Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

12.7kg (28 lbs) Cord Length

HW1200 High Pressure Washer

High Pressure Washer with Self-Priming Function



Continuous Rating Input 1,800W 12MPa 10MPa Reaular Pressure Max Flow Rate High Pressure Hose 10m (33ft) Net Weiaht 11 kg (24.3 lbs) Cord Length

CB-203

GENERAL EQUIPMENT

Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

HW111 High Pressure Washer

11 MPa (110 Bar) High Pressure Washer



Continuous Rating Input 1,700W Max Pressure 11 MPa (110 bar, 1,595 PSI) Max Flow Rate 370 L/h Motor type Universal 50 °C (122 °F) Max Feed Temperature 5.5 m (18 ft.) High Pressure Hose Length Net Weight 7.4 kg (16.3 lbs.)

HW102 High Pressure Washer

Lightweight and compact power washer for home use



Continuous Rating Input 1,300W Max Pressure 100bar (1.450 PSI) Max Flow Rate 360 L/hr Motor Type Sound Power Level Universal 94dB(A) Max Input Temperature High Pressure Hose 50°C Length Net Weight 5.8kg (5.0lbs)

0.3 MPa (3 kgf/cm²)

DVF104Z Cordless Garden Sprayer

18V LXT Li-lon Cordless 10 L Garden Sprayer



Max Pressure Chemical tank 0.3 MPa (3 kgf/cm²) 315x225x415 mm (12-3/8"x8-7/8"x16-3/8") Dimensions (LxWxH) Net Weight 3.8 - 4.1 kg (8.4 - 9.1 lbs.)

Charger, Battery, Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder

DVF154Z Cordless Garden Sprayer

18V LXT Li-Ion Cordless 15 L Garden Sprayer



345x235x525 mm (13-5/8"x9-1/4"x20-3/4") Dimensions (LxWxH) Net Weight 4.1 - 4.4 kg (9.1 - 9.7 lbs.)

Max Pressure Chemical tank

18V

Charger, Battery, Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Spray Pipe Holder, Shoulder Harness, Z: Battery and Charger are sold separately

DMP180 Cordless Inflator

New

18V max LXT Li-Ion Cordless Inflator



Max Air Pressure 830 kPa (121 PSI) [8.3 bar] 200 kPa: 10 L/min Air Discharae Amount 65 cm (25-1/2") Dimensions (LxWxH) 270x76x175 mm Net weight 1.5 - 1.8 kg (3.3 - 4.0 lbs.)



18V 🔆 🖺

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger

MP100DZ Cordless Inflator

12V max CXT Li-Ion Cordless Inflator



Max Air Pressure 830 kPa (121 PSI) [8.3 bar] 200 kPa: 10 L/min Air Discharge Amount Work Amount (pcs) 16" Tires w/BL1041B: 5.2 Hose Length 65 cm (25-1/2") 255x74x173 mm Dimensions (LxWxH) (10"x2-15/16"x6-13/16") Net Weiaht 1.2 - 1.3 kg (2.6 - 3.0 lbs.)





British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are

GENERAL EQUIPMENT

DCF300Z 18V, 14.4V/AC Cordless Fan

330mm (13") fan delivers sufficient airflow in every corner of a large room at job site



High: 55-3.0 Ah, 25-1.3 Continuous Use (min.) Ah (18 V) / 50-3.0 Ah, 22-1.3 Ah (14.4 V) Mid: 90-3.0 Ah, 40-1.3 Ah (18 V) / 80-3.0 Ah, 35-1.3 Ah (14.4 V) Low: 180-3.0 Ah, 80-1.3 Ah (18 V) / 160-3.0 Ah, 70-1.3 Ah (14.4 V)

315x480x600 mm (12-3/8"x18-7/8"x23-5/8") (LxWxH) Net Weight 4.3 - 4.7 kg (9.5 - 10.3 lbs)

AC Adapter, Z: Battery and Charger are sold separately



Cordless Fan DCF203



AC adapter is optional (TE00000175)





Automatic swing fan Adjustable fan head Left/ Right 45° angle







- 3 settings (High 190 m/min, Medium 150 m/min, Low 120 m/min) for optimal air velocity control
- Very compact but 235 mm (9-1/4") Large fan produces strong enough air flow.(High 8.2 m³/min, Medium 6.5 m³/min, Low 5.2 m³/min)



18V / 14.4V LXT Li-lon Cordless 235 mm (9-1/4") Automatic Swing Fan



Continuous Use (min.) w/o oscillation Continuous Use (min.) w oscillation

Max Air Velocity

Air Flow

Dimensions (LxWxH)

Net Weiaht

High: 190 Low: 5.2 m³/min Med: 6.5 m³/min High: 8.2 m³/min 140x333x447 mm (5-1/2"x13"x16-1/2") 1.9 - 2.6 kg

BL1860B Low: 1,155

Med: 700

High: 430 BL1860B Low: 1,010 Med: 650

High: 410 Low: 120

Med: 150

AC Adaptor, Z: Battery and Charger are sold separately

DCF102ZX1 / Z Cordless Fan

18V / 14.4V LXT Li-lon Cordless 180 mm (7-1/8") Automatic Swing Fan

Net Weight



with BL1860B Continuous Use (min.) Med: 705 High: 575 Air Flow Low: 3.0 m³/min Med: 3.8 m³/min Hiah: 4.6 m³/min 185x272x284mm (7-1/4"x10-3/10"x11-1/8") Dimensions (LxWxH)

1.3 - 2.0 kg (2.9 - 4.4 lbs.)

CF101DZ 180mm (7-1/8") Cordless Fan

Automatic Swing Fan

Max Continuous Use w/BL1041B: Low/Medium/High: 630/380/275 185x260x284 mm (7-1/4"x10-1/4"x11-1/8") (LxWxH)Net Weight 1.3 - 1.7 kg (2.8 - 3.8 lbs.)

Up to: 54

at 1m from the light

(10-3/4"x3-1/8"x4-9/16")

source: 3,000 lx 272x79x116 mm

0.26 - 0.93 kg

(0 57 - 2 05 lbs)

160 lm

GENERAL EQUIPMENT



1

Strap Hook

DZ: Battery and Charger are sold separately

DML815 LED Flashlight

Z: Battery and Charger are sold separately

CF100DZ 180mm (7-1/8") Cordless Fan

12V max CXT Li-Ion Cordless 180 mm (7-1/8") Fan



Continuous Use (min.) Low / Medium / High: 630/380/275 BL1021B: Low/Medium/High: 315/190/135 BL1016: Low / Medium / High: 240 / 145 / 105 w/o Battery: 148x260x252 mm Dimensions (L x W x H) (5-7/8x10-1/4x9-7/8" Net Weight

1.2 - 1.4 kg (2.7 - 3.1 lbs)

DML808 Cordless Flashlight

AC Adaptor DZ: Battery and Charger are sold separately

18V / 14.4V LXT Li-lon LED Flashlight, 190 Lumens



18V 14.4V

Run Time (hrs) Luminous flux Up to: 32 190 lm at 1m from the light source 170 - 4,500 lx with BL1815N/BL1820B: 280x79x101 mm (11"x3-Illuminance Dimensions (LxWxH) 1/8"x4") with BL1830B / BL1840B /BL1850B/BL1860B: 297x79x119 mm (11-3/4"x3-1/8"x4-11/16") Net Weight 0.73 - 1.09 kg (1.6 - 2.4 lbs)

Length (with the hook stood). Illuminance: at 50 cm from the light source. Battery and Charger

DML806 18 V, 14.4 V Cordless LED Flashlight

18V / 14.4V LXT Li-lon 21 LED Flashlight, 620 Lumens

High-luminance 4 x 0.5 W LED flashlight provides 160 lumens

Run Time (hrs)

Luminous Flux

Dimensions (LxWxH)

Illuminance

Net weight



Run Time (hrs) Up to: 71 365x78x119 mm Dimensions (LxWxH) (14-3/8"x3-1/16"x4-11/16") Net Weight 0.69 - 1.1 kg (1.5 - 2.4 lbs)

Length (with hook retracted), Overall length (with hook in upright position

Shoulder strap with metal hook. Battery and Charger are sold separately

DML805 Corded and Cordless LED Worklight

L.E.D. Lights Deliver Bright and Even Lighting For Large Workspaces



Run Time (hrs) Up to: 17 at 0.5m from the liaht source Hi: 1,150 lx, Lo: 750 lx at 1m from the Hi: 300 lx. Lo: 200 lx Luminous flux Net Weight 2.3 - 2.7 kg (5.1 - 5.9 lbs.)

DML801 LED Flashlight

18V / 14.4V LXT Li-lon 12 LED Flashlight, 240 Lumens



Run Time (hrs) Up to: 48 380x79x116 mm (15"x9-11/16"x4-9/16") Net Weight 0.61 - 0.98 k (1.4 - 2.2 lbs.)

18V 14.4V

Shoulder Strap, Z: Battery and Charger are sold separately

GENERAL EQUIPMENT

DML185 Rechargeable Flashlight

High-luminance single flashlight provides 180 lumens

Li-ion Ab 6.0 5.0 3.0 1.5







Shoulder Strap, Bulb x2

DFJ410ZL / ZM / ZXL Cordless Fan Jacket DFJ411ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with BL motor



	Run Time (hr)	With BL1860B Low /
	nan mne (m)	Medium/High: 33/24.5/13.5
	Air Flow Settings	Turbo / High /
	,	Medium / Low /
	Air Flow	Turbo / High /
		Medium / Low: 2.2 / 2.1 /
		1.7 / 1.5 m³/min
	Material	Titanium-coated polyester
		-UV and IR reflection
	Size	S/M/L/XL/2XL/3XL
	Pockets	5
	Net weight	DFJ410:0.47kg (1.0 lbs)
		DFJ411:0.49kg (1.1 lbs)

18V 14.4V 12V_{MAX}



Z: Battery and Charger are sold separately

DFJ400Z2XL/ZL/ZXL DFJ401Z3L / ZLL 18V, 12V Cordless Fan Jacket

Excellent cooling performance even with safety vest on



Run Time (hr)	With BL1860B Low / Medium/High: 34/25/14
Air Flow Settings	Turbo / High / Medium / Low
AirFlow	Turbo / High / Medium / Low: 1.4 / 1.2 / 1.0 / 0.8 m³/min
Size	S/M/L/XL/2XL/3XL
Pockets	5
Net weight	1.5 - 1.9kg (3.3 - 4.1lbs)

18V 14.4V 12V_{MAX} 4 10

Fan Hook. Battery & Charger Sold Separately. Net weight: Jacket size L + Fan

DFJ310ZL / ZM / ZXL Cordless Fan Jacket DFJ311ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with BL motor



	Run Time (hr)	With BL1860B Low / Medium/High:33/24.5/13.5
	Air Flow Settings	Turbo / High / Medium / Low
	Air Flow	Turbo / High / Medium / Low: 2.2 / 2.1 / 1.7 / 1.5 m³/min
	Material	Cotton - Water absorbency
	Size	S/M/L/XL/2XL/3XL
	Pockets	5
	Net weight	DFJ310:0.49kg (1.1 lbs) DFJ311:0.52kg (1.1 lbs)

18V 14.4V 12V_{MAX}



Z: Battery and Charger are sold separately

DFJ300Z2XL / Z3L / ZL / ZLL / ZM / ZXL DFJ301Z3L / ZL / ZLL / ZM 18V, 12V Cordless Fan Jacket

Excellent cooling performance even with safety vest on



Run Time (hr)	With BL1860B Low / Medium/High: 34/25/14
Air Flow Settings	Turbo / High / Medium / Low
AirFlow	Turbo / High / Medium / Low: 1.4 / 1.2 / 1.0 / 0.8 m³/min
Size	S/M/L/XL/2XL/3XL
Pockets	5
Net weight	1.5 - 1.9kg (3.3 - 4.1lbs)

18V 14.4V 12V_{MAX} 4 10

Fan Hook. Battery & Charger Sold Separately. Net weight: Jacket size L + Fan

DFJ214Z2XL / ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with $\ensuremath{\mathsf{BL}}$ motor



Air Flow Settings Turbo / High / Medium / Low Air Flow Turbo / High / Medium / Low: 2.2 / 2.1 / 1.7 / 1.5 m ³ /min Material Polyester - Water repellency, antistatic fabric Size S/M/L/XL/2XL/3XL Pockets 5 Net weight 0.54kg (1.2 lbs)		Run Time (hr)	With BL1860B Low / Medium/High:33/24.5/13.5
Medium / Low: 2.2/2.1/ 1.7/1.5 m³/min Material Polyester - Water repellency, antistatic fabric Size S/M/L/XL/2XL/3XL Pockets 5		Air Flow Settings	
antistatic fabric Size S/M/L/XL/2XL/3XL Pockets 5		AirFlow	Medium / Low: 2.2 / 2.1 /
Pockets 5		Material	
		Size	S/M/L/XL/2XL/3XL
Net weight 0.54kg (1.2 lbs)		Pockets	5
		Net weight	0.54kg (1.2 lbs)
	_		

Z: Battery and Charger are sold separately

DFJ213ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with BL motor



		Run Time (hr)	With BL1860B Low / Medium/High:33/24.5/13.5
		Air Flow Settings	Turbo / High / Medium / Low
		Air Flow	Turbo / High / Medium / Low: 2.2 / 2.1 / 1.7 / 1.5 m³/min
		Material	Polyester - Stretchable fabric
		Size	S/M/L/XL/2XL/3XL
		Pockets	5
		Net weight	0.54kg (1.2 lbs)
4			
4	_		

Z: Battery and Charger are sold separately

DFJ212ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with BL motor



Kun Time (nr)	WITH BL 1860B LOW /
41.51.5	Medium/High:33/24.5/13.5
Air Flow Settings	Turbo / High /
	Medium / Low /
Air Flow	Turbo / High /
	Medium / Low: 2.2 / 2.1 /
	1.7 / 1.5 m³/min
Material	Polyester -
	High-repellency fabric
Size	S/M/L/XL/2XL/3XL
Pockets	4
Net weight	0.43kg (0.9 lbs)

MUL DI 10CODI

18V 14.4V 12V_{MAX}



Z: Battery and Charger are sold separately

GENERAL EQUIPMENT

DFJ210ZL / ZM / ZXL Cordless Fan Jacket DFJ211ZL / ZM / ZXL Cordless Fan Jacket

Effective cooling air flow generated by two Fan units with BL motor



Run Time (hr)	With BL1860B Low / Medium/High:33/24.5/13.5
Air Flow Settings	Turbo / High / Medium / Low
Air Flow	Turbo / High / Medium / Low: 2.2 / 2.1 / 1.7 / 1.5 m³/min
Material	Polyester - Water repellent
Size	S/M/L/XL/2XL/3XL
Pockets	5
Net weight	DFJ210 : 0.39kg (0.9 lbs) DFJ211 : 0.41kg (0.9 lbs)

18V 14.4V 12V_{MAX}



Z: Battery and Charger are sold separately

DFJ202Z2XL/Z3L/ZL/ZLL/ZXL DFJ203Z3L / ZL / ZLL / ZM 18V, 12V Cordless Fan Jacket

Excellent cooling performance even with safety vest on



Run Time (hr)	With BL1860B Low / Medium/High: 34/25/14
Air Flow Settings	Turbo / High / Medium / Low
Air Flow	Turbo / High / Medium / Low: 1.4 / 1.2 / 1.0 / 0.8 m³/min
Size	S/M/L/XL/2XL/3XL
Pockets	6
Net weight	DFJ202 : 710 g (1.6 lbs) DFJ203 : 730 g (1.6 lbs)

Fan Hook. Battery & Charger Sold Separately. Net weight: Jacket size L + Fan

DFV210ZL / ZM / ZXL Cordless Fan Vest

Effective cooling air flow generated by two Fan units with BL motor



	Run Time (hr)	With BL1860B Low / Medium/High:33/24.5/13.5
	Air Flow Settings	Turbo / High / Medium / Low
	AirFlow	Turbo / High / Medium / Low: 2.2 / 2.1 / 1.7 / 1.5 m³/min
	Material	Polyester - High-repellency fabric
	Size	S/M/L/XL/2XL/3XL
	Pockets	3
	Net weight	0.38kg (0.8lbs)

18V 14.4V 12V_{MAX}





Z: Battery and Charger are sold separately

DCJ206Y2XL / YXL / YL / YM 18V, 14.4V Cordless Heated Jacket

Excellent cooling performance



Run Time (hrs)	with BL1860(B) Low / Medium / High: 35 / 14 / 8.5
Heat Zones	Total/Front/Back: 5/2/3
Heat Settings	High / Medium / Low
Size	S/M/L/XL/2XL/3XL
Pockets	6
Net weight	1.2 kg (2.5 lbs)

Net Weight: Jacket size L only

Z: Battery and Charger are sold separately

DCJ205Y2XL / YXL / YL / YM 18V, 14.4V Cordless Heated Jacket

Excellent cooling performance



Z: Battery and Charger are sold separately

18V 14.4V

i-ion Ah 6.0 5.0 3.0 1.5	Run Time (hrs)	with BL1860(B) Low / Medium / High: 35 / 14 / 8.5
	Heat Zones	Total/Front/Back: 5/2/3
	Heat Settings	High / Medium / Low
	Size	S/M/L/XL/2XL/3XL
	Pockets	6
	Net weight	1.2 kg (2.5 lbs)
	Net Weight: Jacket size	L only

DCV202Y2XL / YXL / YL / YM 18V, 12V Cordless Heated Vest

Excellent cooling performance even with safety vest on



Run Time (hrs)	with BL1860(B)
	Low / Medium / High:
	35/20/10
Heat Zones	Total / Front / Back:
	4/2/2
Heat Settings	High / Medium / Low
Size	S/M/L/XL/2XL/3XL
Pockets	4
Net weight	0.5kg (1.1 lbs)
Net Weight: Jacket size L only	,

18V 14.4V

Z: Battery and Charger are sold separately

DCV200Z2XL / ZXL / ZL / ZM 18V, 14.4V Cordless Heated Vest

Excellent cooling performance even with safety vest or



18V 14.4V

IL	ii salety vest on	
	Run Time (hrs)	with BL1850(B) Low/Medium/High: 28/16/8
	Heat Zones	Total/Shoulders/Back: 2/1/1
	Heat Settings	High / Medium / Low
	Size	S/M/L/XL/2XL/3XL
	Pockets	4
	Net weight	0.81 - 1.2 kg (1.8 - 2.6 lbs)

Net Weight: Jacket size L + Battery + Battery Holder

Battery Holder, Pouch (DCV200) Z: Battery and Charger are sold separately

CV101DZ2XL/DZL/DZM/DZXL

12V max CXT Li-lon Heated Vest



Run Time (hrs)	With BL1041B Low : 14 Medium: 7.5 High: 4
Heat Zones	Total : 2 Shoulders: 1 Back: 1
Heat Settings	High/Medium/Low
Size	S/M/L/XL/2XL/3XL
Pockets	4
Net Weight	700 g (1.5 lbs)

12V_{max}



Battery Holder DZ: Battery and Charger are sold separately

ACCESSORIES (GENERAL EQUIPMENT)

Battery Holder



Description	Part No.
DFJ210, DFJ211, DFJ310, DFJ311, DFJ410,	198732-2 LXT
DFJ411, DFJ212, DFJ213, DFJ214, DFV210	198731-4 CXT



Description	Part No.
DCV200	GM00001606
CV101D	GM00001604



Sprayer accessories

Shape	Model No.	Features/ Recommended use	Part No.
Wide angle herbicide nozzle		for spraying herbicides; also ideal for watering plants or spraying soil conditioner	6908031000
Herbicide nozzle		Hard to become mist	
15		preventing diffusion of medicine.	6958011000
Y-shaped double nozzle		for general pesticide	
		applications using insecticides, fungicides, etc.	6958025000
Long two head nozzle			
~	EF1550RH EVH2000	Wide spraying with wide angle outlet.	6949001000
U-shaped double nozzle			
		Wide spraying with wide angle outlet.	6958018000
Triple concentric nozzle			
\Diamond		Spraying in the form of circular.	6909500100
Quadruple concentric nozzle			
P		Spraying in the form of circular.	6919500000
Compact nozzle		Convenient for	
		spraying in the green house by compact nozzle.	6939025000
Jet nozzle 2			
	EVH2000	Diffusion or straight is selectable with one tach	6939024000
Super jet nozzle			
		Diffusion or straight is selectable.	6939028000

ACCESSORIES (GENERAL EQUIPMENT)

HW102, HW111

Quick coupling



Gun



Extension Lance



Roto power



HW102

Multi Lance



Complete detergent tank



High pressure hose 5M



Description	Part No.
Quick coupling	3082661
Gun	3320152
Extension Lance	3320130
Roto power	3320120
Multi Lance	3640640
Complete detergent tank	3640090
High pressure hose 5M	3640630

Power washer accessories for DHW080, HW1200, & HW1300

HW1300			
Shape	Model No.	F	art No.
Trigger gun set	DHW080 HW1200 HW1300	197842-2	
Variable nozzle set	DHW080 HW1200 HW1300	197822-8	
Variospray lance set	DHW080 HW1200 HW1300	1	97876-5
Cyclone jet nozzle set	DHW080 HW1200 HW1300	1	97824-4
Cyclone guard set	DHW080 HW1200 HW1300	1	97864-2
Under body spray lance set	DHW080 HW1200* HW1300* (*for 110-127V)	1	97859-5
	HW1200** HW1300** (**for 220V-240V)	1	98909-9
Extension pipe set (0.9m / 1.3m / 1.7m)	DHW080 HW1200 HW1300	197870-7	
Rotating brush set	DHW080 HW1200 HW1300	197831-7	
Wash brush set	DHW080 HW1200 HW1300	197828-6	
Foam nozzle set	DHW080 HW1200 HW1300	1	97886-2
Pipe cleaning hose	DHW080	10m	197837-5
	HW1200 HW1300	15m	197840-6
High pressure extension hose	DHW080	5m	197845-6
	HW1200 HW1300	8m 10m	197847-2 197850-3
Twist prevention joint set	DHW080 HW1200 HW1300	197867-6	
Self-suction hose set	DHW080 HW1200 HW1300	197873-1	
Accessory joint set	DHW080 HW1200 HW1300	197853-7	
Absorption connector set	DHW080 HW1200 HW1300	197881-2	
One touch joint set	DHW080 HW1200 HW1300	1	97883-8
Cleaner pin set	DHW080 HW1200	1	97879-9

lcon



Variable Speed

Brake

Reversing

Mechanical 2-Speed

Mechanical 3-Speed

Electronic 2-Speed

Electronic 3-Speed Electronic 4-Speed

Keyless Chuck

Torque Setting 6

Torque Setting 9

Torque Setting 16

Torque Setting 18

Torque Setting 20

Torque Setting 21

Dust Collection

Torque Limiter

Constant Speed

Soft Start

Bevel Cutting 45 left

Bevel Cutting L45 R5

Bevel Cutting 45 LR

Makita Shank Jig Saw Blade

Bayonet Shank Jig Saw Blade

Laser Marker

Orbital Cutting

Hook & Loop

Depth Adjustment

Sequential and Bump-fire

Auto Firing Stop

Automatic Oiling

Stainless Tank

Wooden Carrying Case

Chain Brake

Anti Vibration

Revolving Hose

Static Free Hose

Primer Pump

SDS-PLUS Shank

SDS-MAX Shank

17mm Hex Shank

21mm Hex Shank

28.6mm Hex Shank

30mm Hex Shank

Capacitor Discharge Ignition

Decompression Valve

Auto Decompression

Electronic Ignition

Rapid Start

Built-in Job Light

Carrying Case



www.makita.com.sg

TRADEMARKS















Makita Corporation and its affiliates (collectively referred to as "Makita") are the registered owners of the above trademarks and own the exclusive rights to these trademarks. A party who manufactures, advertises, offers for sale, sells, distributes, imports or exports power tools, batteries and/or related accessories using a trademark which is identical or similar to our trademarks may have infringed our trademarks. Makita take a serious view of trademark infringement and will not hesitate to take any legal action against any party who infringes our trademark rights.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711 Email: msgproductteam@makita.com.sg

Website: www.makita.com.sg





